ABL SURSUM
Z59.16
IP54
IP54
1.1
1.2
1.3

COMBINATION UNITS
SOCKET OUTLET COMBINATIONS

Stationary Socket Outlet Combinations

Modular System 102
Key Advantages 104
Sizes 107
Socket Outlet Combinations Series 45 111
Socket Outlet Combinations Series 51 113
Socket Outlet Combinations Series 52 114
Socket Outlet Combinations Series 53 116
Socket Outlet Combinations Series 54 117
Socket Outlet Combinations Series 59 119
Socket Outlet Combinations Series 60 122
Socket Outlet Combinations Series 60 (colored) 126
Weather Protection Hoods 127
Rubber Wall-Mounted Distribution Units, Housing Series 88 128
Rubber Wall-Mounted Distribution Units, Housing Series 98 129
CEE Switched Interlocked Wall-mounted Socket Outlets 131
CEE Switched Interlocked Wall-mounted Socket Outlets, with DIN Rail 134
CEE Wall-mounted Socket Outlets with Protection 136
CEE Socket Outlet Combinations 137
Specifications 138

Mobile Socket Outlet Combinations

Modular System 140
Overview 142
Power Cubes Series 30 148
Plastic Socket Outlet Case Series 45 150
Plastic Socket Outlet Case Series 55 152
Plastic Socket Outlet Case Series 73 153
Multiple Power Strip (rubber) Series 48 154
Multiple Power Strip Safety (rubber) PRCD-S 155
Rubber Socket Outlet Case Series 58 156
Rubber free-standing distribution units Series 68 157
Rubber free-standing distribution units Series 78 158
EventLine 160

STATIONARY SOCKET OUTLET COMBINATIONS
MODULAR SYSTEM

SINGLE SUPPLIER SOLUTIONS We manufacture all the components for our Socket Outlet Combinations ourselves. This way we can guarantee the highest quality and flexible solutions through individually tailored combinations. You can find a planning template in the Downloads section of our website www.abl-sursum.com. Please direct any queries to kombis@abl-sursum.com or call +49(0) 9123/188-164, 126.

MINIATURE CIRCUIT BREAKERS AND RESIDUAL CURRENT CIRCUIT BREAKERS

Miniature Circuit Breakers
- Switching capabilities 6/10 kA,
- B, C, D, K and Z characteristics

Residual Current Devices
- Type A (pulsating current sensitive)
- Type B (universal current sensitive)

RAIL-MOUNTED DEVICES

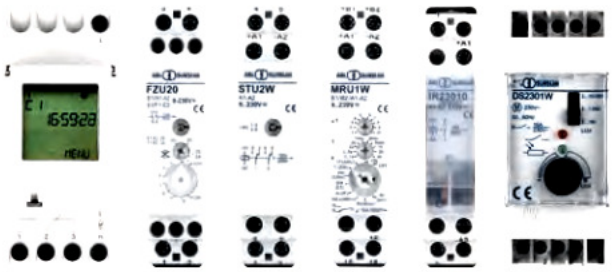

- Switches, Buttons, Indicator Lights
- Mechanical and Electronic Relays and Remote Switches
- Grid Monitoring, Installation Contactors
- Timers
- Safety Transformers

SCHUKO SOCKET OUTLETS

SCHUKO®

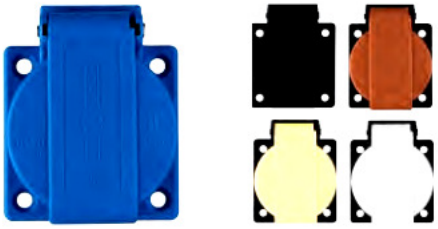

- Self-closing, hinged lid
- Range of protection ratings
- Shatter-proof thermoplastics
- Range of colors

INTERNATIONAL STANDARD SOCKET OUTLETS

for Belgium, France, Czech Republic, Poland, Switzerland, USA, Canada, United Kingdom, China, Australia

PANEL MOUNTED SOCKET OUTLETS

- with Range of voltages and protection ratings acc. to UL and IEC
- Feed plugs

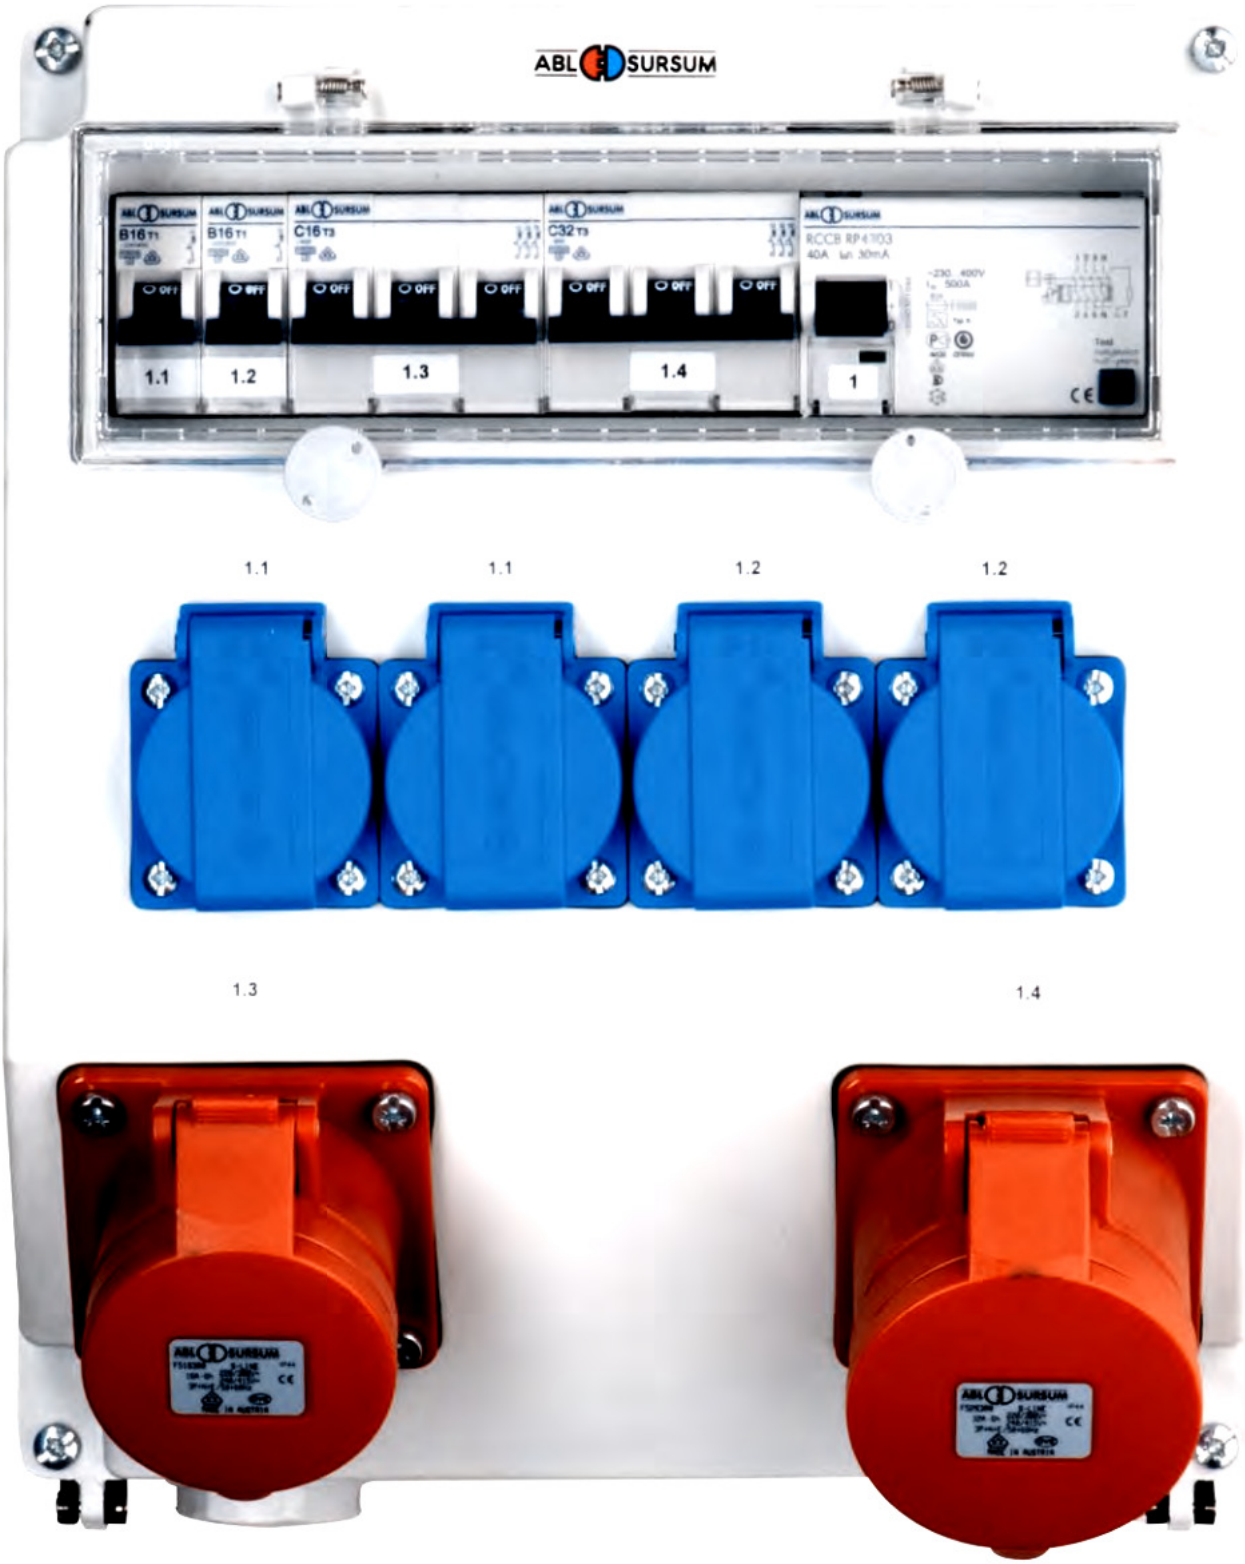
ABL SURSUM
B16 T1
B16 T1
C16 T3
C32 T3
RCCB RP4103
40A
1.1
1.2
1.3
1.4
1
1.1
1.1
1.2
1.2
1.3
1.4

THE 8 KEY ADVANTAGES OF
OUR STATIONARY SOCKET OUTLET COMBINATIONS

1 PLASTIC HOUSINGS

Range of 6 different housing series (thermoplastic):
- Temperature and impact resistant
- Weather, UV and ozone resistant
- Free of halogens
- Outstanding tracking resistance
- Resistant to a wide range of chemicals

2 SOLID RUBBER HOUSING

2 Series of solid rubber housings:
- Unbreakable, impact resistant and long-lasting
- Free of halogens
- Low flammability and self-extinguishing
- Resistant to welding and other flying sparks
- Oil, grease, acid and gasoline resistant

3 COLOR OPTIONS

Silver and signal yellow

4 EXPANDABLE

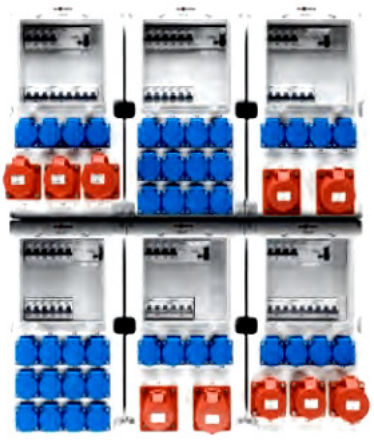

Horizontal and / or vertical, side-by-side flanged housing installation options.

5 SAFE

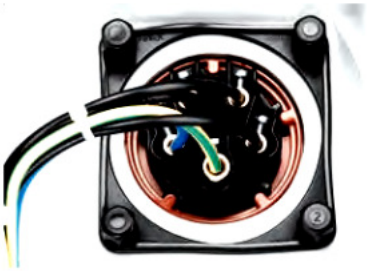

Maximum safety through insulated attachment of flanged sockets to the housing using plastic cap nuts. Numbered current pathways for clearly structured installation and wiring-up. Our Socket Outlet Combinations are delivered connection-ready.

6 EASY UPGRADES

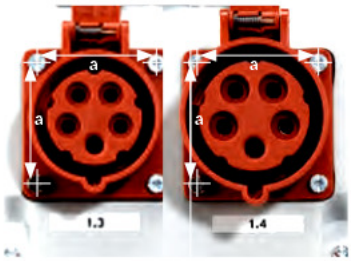

Standardized flange sizes for standard types, e.g. CEE 16/32 A 6h.
All timer settings according to IEC 60309 are possible (see also table on page 239) All standard issue industrial-grade connectors are wired for clockwise phase sequence.

7 QUALITY-ASSURED

Socket Outlet Combinations subject to item-by-item checks according to EN 60439-1. All quality assurance and product data are recorded and reported. The ABL SURSUM quality management system is DIN ISO 9001:2000 certified.

8 SECURE INSTALLATION

Internal mounting option (separate mounting compartment with 4 or 6-fold mounting options for solid installation) or use the external-mount, stainless steel wall bracket (accessory).

You can find a planning template in the Downloads section of our website www.abl-sursum.com.

Problem: condensed water in electrical systems

For housings with a high degree of protection and thus a high degree of leak-proofness, condensed water forms inside if there are temperature differences between the inside and outside temperatures. Temperature variations do not only occur due to thermal influences from outside – the inner temperature can also increase due to the power loss of the devices installed. The warmer inner air naturally enriches itself with moisture from outside since the housing is not completely gastight.
If the housing now cools down e.g. by switching off the system, the air inside re-releases the moisture and this forms as a film of condensed water on the cool housing walls.

Small drops form gradually, which then flow to the lowest point of the housing. Less relevant is the problem of condensed water formation with normal installation in rooms.

As an exception here, the conditions should be mentioned by which high humidity and large temperature variations occur like e.g. canteen kitchens, laundries, car washes etc.

Special caution is necessary with installations of unprotected electrical systems outdoors. Here the danger of condensed water forming is especially high due to the change between day and night, strong sunshine and cool weather conditions, and the corresponding temperature differences between inside and outside air.

Measures against formation of condensed water

- **Choosing the installation location**
  A first aspect is the choice of installation location. Here one can try to avoid large temperature differences in advance.
- **Technical measures**
  In every wall-mounted enclosure from ABL SURSUM there is a default potential opening at the lowest point. Collected condensed water can flow through here after puncturing.

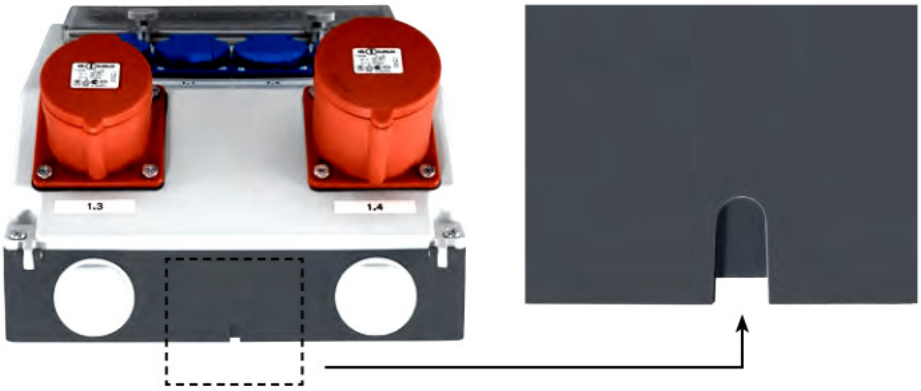

Pressure compensation membrane M 12 x 1.5
The best solution, however, is the installation of a pressure compensation membrane. This has an air outlet of up to 120 litres per hour at a pressure difference of 70 mbar. It makes possible even high degrees of protection like IP67 and can be mounted for wall thicknesses of up to 4 mm.

Connection thread	M12x1,5
Mounting	in wall thicknesses of up to 4 mm
Material	polyamide
Colour	black
Note	delivery incl. counter nut
Packing unit	5 pieces
Article no.	**8990900**

SERIES OF THE STATIONARY SOCKET OUTLET COMBINATIONS

Size comparison – dimensions lateral view

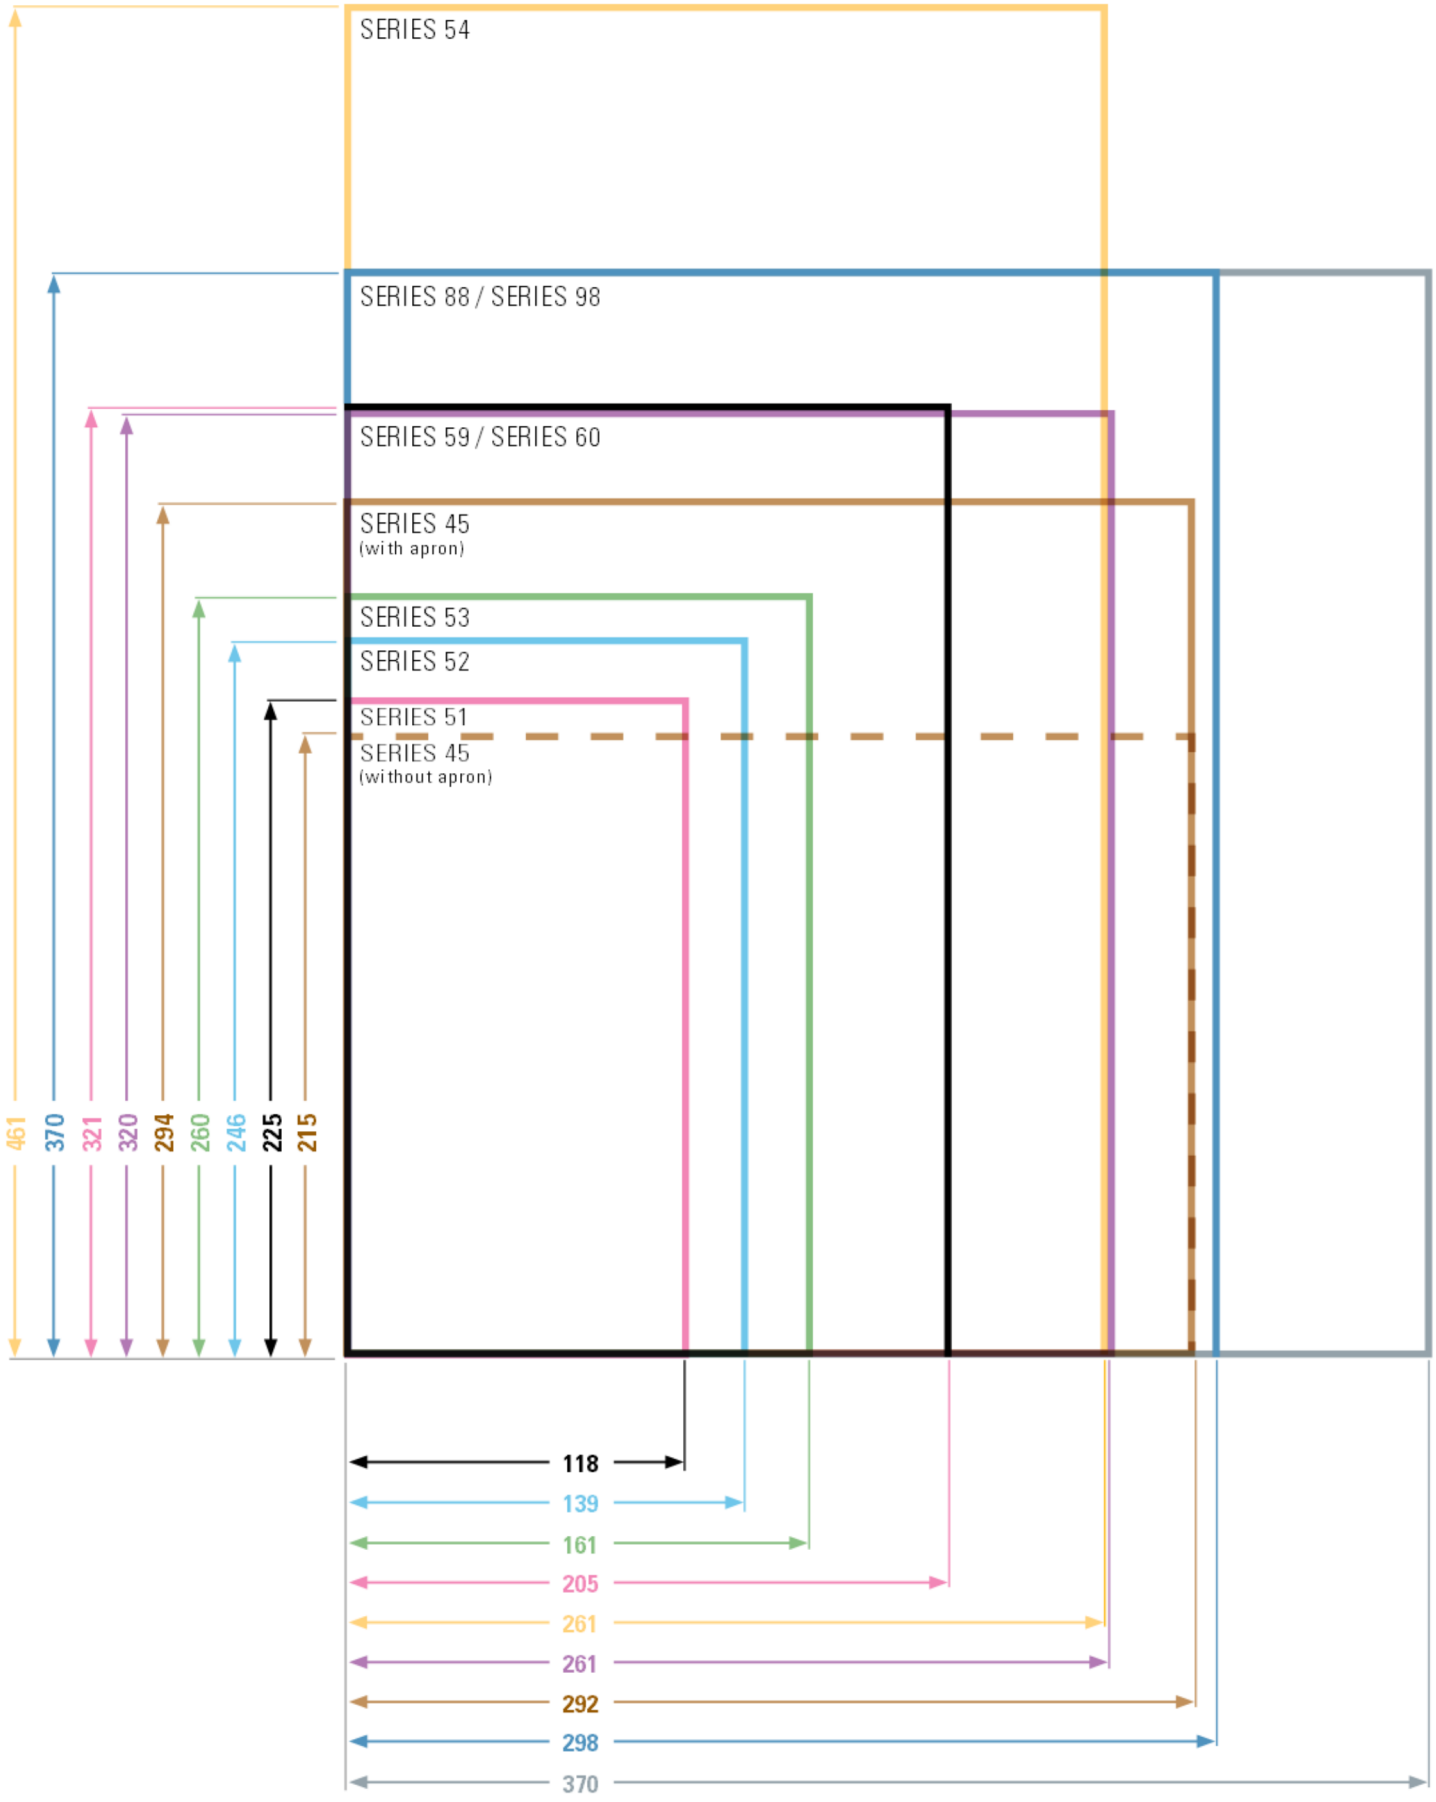

SERIES OF THE STATIONARY SOCKET OUTLET COMBINATIONS

SERIES 45

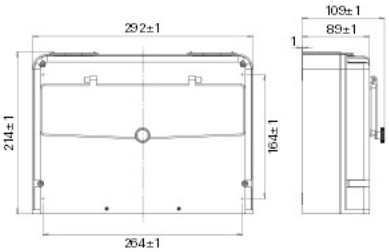

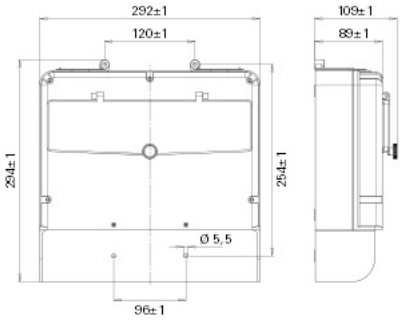

SERIES 51



SERIES 52



SERIES 53

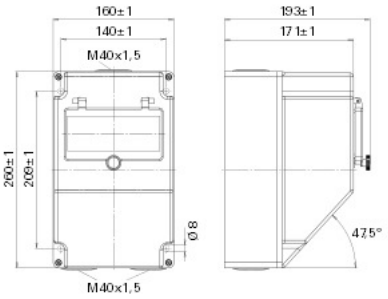

SERIES 54

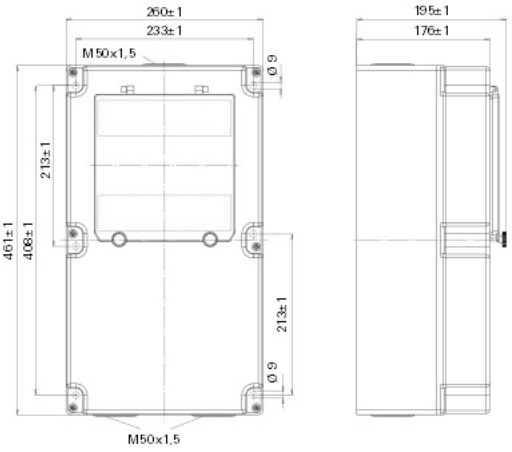

SERIES OF THE STATIONARY SOCKET OUTLET COMBINATIONS

SERIES 59

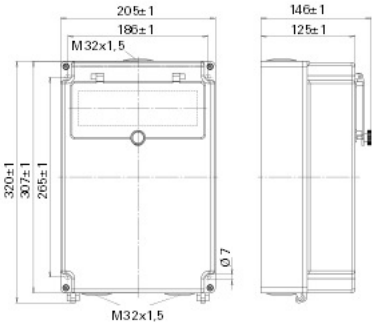

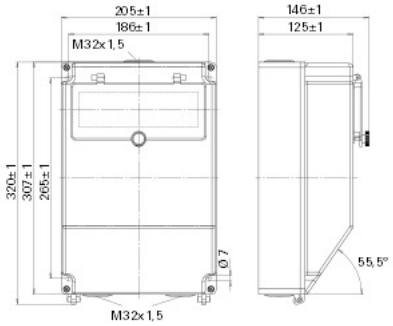

SERIES 60

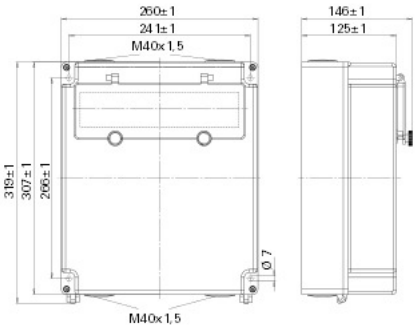

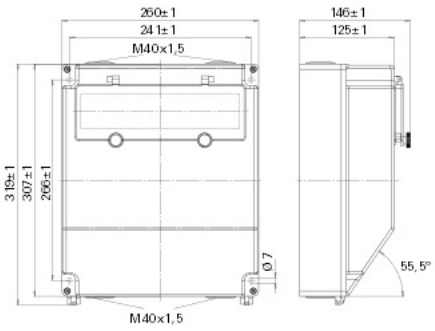

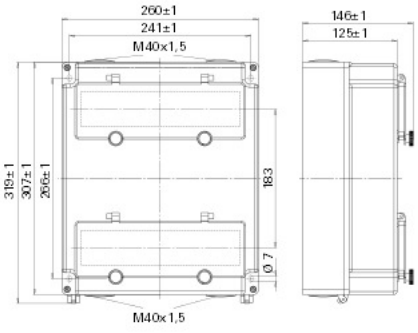

SERIES OF THE STATIONARY SOCKET OUTLET COMBINATIONS

SERIES 88





SERIES 60





SOCKET OUTLET COMBINATIONS SERIES 45

splash-proof IP44, pre-wired ready to connect

SERIES 45

HOUSING SIZE
W x H x D 292 x 214 x 109 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
Cable Inlet: 2 x M40 (top)

Without apron Interior mount using mounting rail for 13 HP

ART.-NO. B 45.04

Socket outlet Combination Options

				
Fitted with				
CEE Sockets		1 x 3/16 A		4 x 3/16 A
SCHUKO Sockets	4	3	5	
FI Switches (RCCB)	1 x 2/25/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	4 x 16 A, 1-pole B	1 x 16 A, 1-pole C 3 x 16 A, 1-pole B	5 x 16 A, 1-pole B	4 x 16 A, 1-pole C
Art.-No.		**Z 45.02**	**Z 45.03**	**Z 45.04**
Note	**Stock item**			

SOCKET OUTLET COMBINATIONS SERIES 45

splash-proof IP44, pre-wired ready to connect

SERIES 45

HOUSING SIZE
W x H x D 292 x 294 x 109 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY

Cable Inlet: 2 x M40 (top)

Without apron Exterior mount using mounting rail for 13 HP

ART.-NO. B 45.00

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	2 x 5/16 A 1 x 5/32 A	1 x 5/16 A 1 x 5/32 A	2 x 5/16 A	2 x 5/32 A
SCHUKO Sockets	4	3	5	5
FI Switches (RCCB)		1 x 4/40/0.03 A		1 x 4/40/0.03 A
LS Switch/Fuse	1 x 32 A, 3-pole C 2 x 16 A, 3-pole C 4 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 3 x 16 A, 1-pole B	2 x 16 A, 3-pole C 5 x 16 A, 1-pole B	2 x 32 A, 3-pole C 3 x 16 A, 1-pole B
Art.-No.	**Z 45.05**	**Z 45.06**	**Z 45.07**	**Z 45.08**
Note		**Stock item**		

				
Fitted with				
CEE Sockets	1 x 3/16 A 1 x 5/16 A 1 x 5/32 A	1 x 5/16 A 1 x 5/32 A	1 x 5/16 A	1 x 3/16 A 2 x 5/32 A
SCHUKO Sockets	5	4	5	5
FI Switches (RCCB)			1 x 4/40/0.03 A	
LS Switch/Fuse	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 1 x 16 A, 1-pole C 5 x 16 A, 1-pole B	Neozed Fuse Sockets 1 x 63 A, 3-pole 1 x 16 A, 3-pole 2 x 16 A, 1-pole	5 x 16 A, 1-pole B 1 x 16 A, 3-pole C	5 x 16 A, 1-pole C 1 x 16 A, 1-pole C 2 x 32 A, 3-pole C
Art.-No.	**Z 45.09**	**Z 45.10**	**Z 45.17**	**Z 45.18**

SOCKET OUTLET COMBINATIONS SERIES 51

splash-proof IP44, pre-wired ready to connect

SERIES
51

HOUSING SIZE
W x H x D 118 x 225 x 129 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend

Cable Inlets: top and bottom, 2 x M25 each

With window and mounting rail for 5 HP
ART.-NO. B 51.01

Without window
ART.-NO. B 51.00

Socket outlet Combination Options

	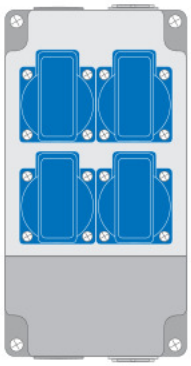	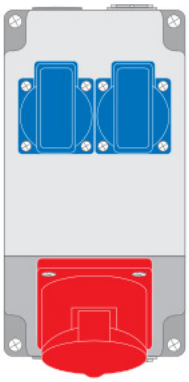	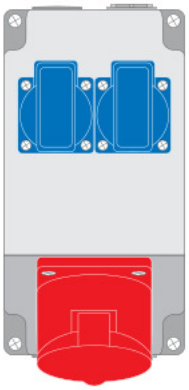	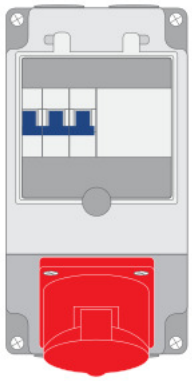
Fitted with				
CEE Sockets		1 x 5/16 A	1 x 5/32 A for 2 separate cable inputs	1 x 5/16 A
SCHUKO Sockets	4	2	2	
FI Switches (RCCB)				
LS Switch/Fuse				1 x 16 A, 3-pole C
Art.-No.	**Z 51.02**	**Z 51.01**	**Z 51.32**	**Z 51.05**
Note		**Stock item**		

SOCKET OUTLET COMBINATIONS SERIES 52

splash-proof IP44, pre-wired ready to connect

SERIES 52

HOUSING SIZE
W x H x D 138 x 245 x 131 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend

Cable Inlets: top and bottom, 2 x M25 each

With window and mounting rail for 7 HP
ART.-NO. B 52.01

Without window
ART.-NO. B 52.00

Socket outlet Combination Options

	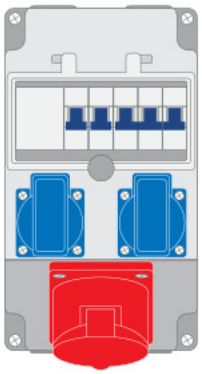	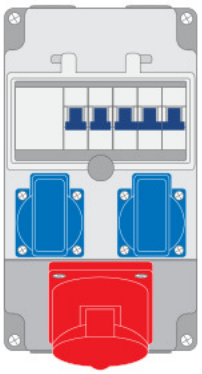	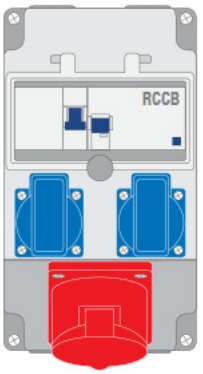	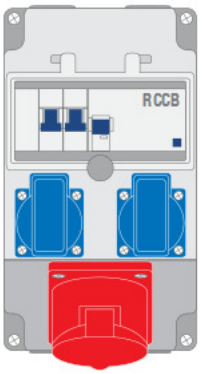
Fitted with				
CEE Sockets	1 x 5/16 A	1 x 5/16 A	1 x 5/16 A	1 x 5/16 A
SCHUKO Sockets	2	2	2	2
FI Switches (RCCB)			4/40/0.03 A	4/40/0.03 A
LS Switch/Fuse	1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	1 x 16 A, 3-pole C 2 x 16 A, 1-pole C	1 x 16 A, 1-pole B	2 x 16 A, 1-pole B
Art.-No.	**Z 52.02**	**Z 52.22**	**Z 52.07**	**Z 52.27**
Note:	**Stock item**		**Stock item**	

	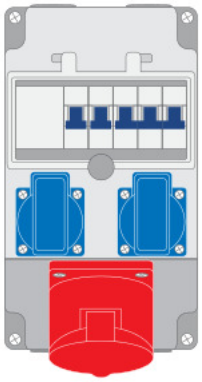	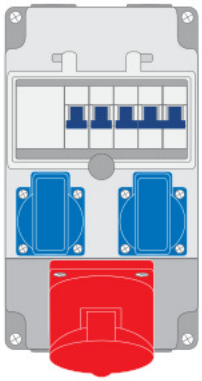	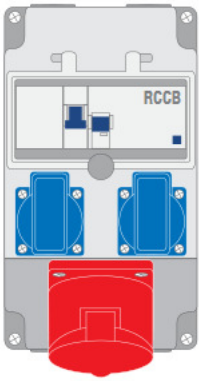	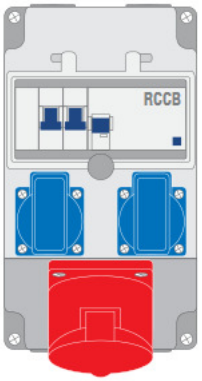
Fitted with				
CEE Sockets	1 x 5/32 A	1 x 5/32 A	1 x 5/32 A	1 x 5/32 A
SCHUKO Sockets	2	2	2	2
FI Switches (RCCB)			4/40/0.03 A	4/40/0.03 A
LS Switch/Fuse	1 x 32 A, 3-pole C 2 x 16 A, 1-pole B	1 x 32 A, 3-pole C 2 x 16 A, 1-pole C	1 x 16 A, 1-pole B	2 x 16 A, 1-pole B
Art.-No.	**Z 52.11**	**Z 52.32**	**Z 52.34**	**Z 52.37**
Note:				

SOCKET OUTLET COMBINATIONS SERIES 52

splash-proof IP44, pre-wired ready to connect

SERIES 52

HOUSING SIZE
W x H x D 138 x 245 x 131 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend

Cable Inlets: top and bottom, 2 x M25 each

With window and mounting rail for 7 HP
ART.-NO. B 52.01

Without window
ART.-NO. B 52.00

Socket outlet Combination Options

	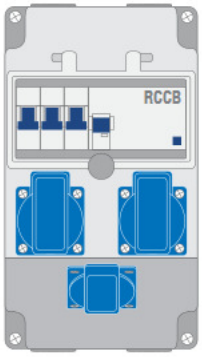	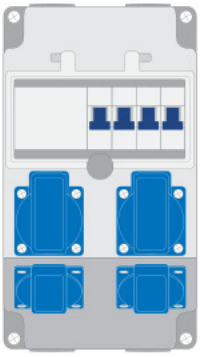	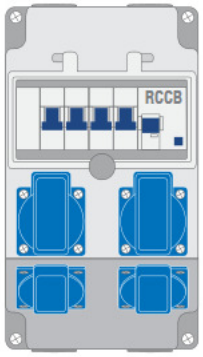	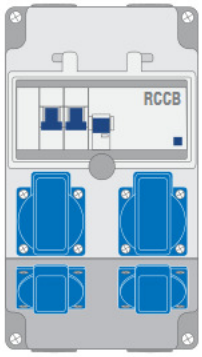
Fitted with				
CEE Sockets				
SCHUKO Sockets	3	4	4	4
FI Switches (RCCB)	1 x 4/40/0.03 A		1 x 2/25/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	3 x 16 A, 1-pole C	4 x 16 A, 1-pole B	4 x 16 A, 1-pole B	2 x 16 A, 1-pole B
Art.-No.	**Z 52.26**	**Z 52.03**	**Z 52.24**	**Z 52.25**
Note:		**Stock item**		

	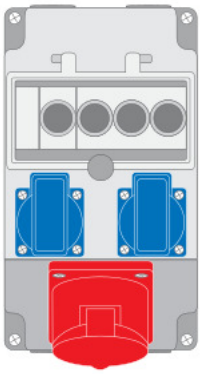	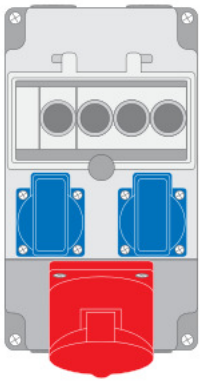	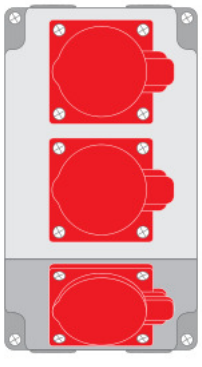
Fitted with			
CEE Sockets	1 x 5/16 A	1 x 5/32 A	3 x 5/16 A
SCHUKO Sockets	2	2	
FI Switches (RCCB)			
LS Switch/Fuse	Neozed Fuse Sockets 1 x 16 A, 3-pole 1 x 16 A, 1-pole	Neozed Fuse Sockets 1 x 63 A, 3-pole 1 x 16 A, 1-pole	
Art.-No.	**Z 52.09**	**Z 52.10**	**Z 52.13**
Note:			

SOCKET OUTLET COMBINATIONS SERIES 53

splash-proof IP44, pre-wired ready to connect

SERIES 53

HOUSING SIZE
W x H x D 160 x 260 x 193 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend

Cable Inlets: top 1 x M40, bottom 2 x M40

With window
and mounting rail for 7 HP
ART.-NO. B 53.01

Without window
ART.-NO. B 53.00

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	2 x 5/16 A	1 x 5/16 A 1 x 5/32 A	2 x 5/16 A	1 x 5/63 A
SCHUKO Sockets			2	
FI Switches (RCCB)				
LS Switch/Fuse	2 x 16 A, 3-pole C	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C	2 x 16 A, 3-pole C 1 x 16 A, 1-pole B	1 x 63 A, 3-pole
Art.-No.	**Z 53.01**	**Z 53.04**	**Z 53.14**	**Z 53.15**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

SOCKET OUTLET COMBINATIONS SERIES 54

splash-proof IP44, pre-wired ready to connect

SERIES 54

HOUSING SIZE
W x H x D 260 x 461 x 195 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend

Cable Inlets: 1 x M50 top, 2 x M50 bottom

With window and
2 mounting rails for 2 x 10 HP
ART.-NO. B 54.01

Without window
ART.-NO. B 54.00

Socket outlet Combination Options

				
Fitted with				
CEE Sockets		6 x 3/16 A	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A
SCHUKO Sockets	12		4	4
FI Switches (RCCB)	1 x 4/40/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A	1 x 4/63/0.03 A
LS Switch/Fuse	12 x 16 A, 1-pole B	6 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 4 x 16 A, 1-pole C	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 4 x 16 A, 1-pole C
Art.-No.	**Z 54.14**	**Z 54.11**	**Z 54.21**	**Z 54.20**
Hinweis	mit Klemmstein 2 x 5 x 25 mm²	mit Klemmstein 2 x 5 x 25 mm²	mit Klemmstein 2 x 5 x 25 mm²	mit Klemmstein 2 x 5 x 25 mm²

				
Fitted with				
CEE Sockets	1 x 5/16 A 1 x 5/32 A	1 x 5/16 A 1 x 5/32 A	2 x 5/32 A	2 x 5/32 A
SCHUKO Sockets	2	2	4	4
FI Switches (RCCB)	1 x 4/40/0.03 A	1 x 4/63/0.03 A		1 x 4/40/0.03 A
LS Switch/Fuse	Neozed Fuse Sockets 1 x 63 A, 3-pole 1 x 16 A, 3-pole 2 x 16 A, 1-pole	Neozed fuse sockets 1 x 16 A, 3- pole 1x 63 A, 3-pole 2x 16 A, 1-pole	Neozed Fuse Sockets 2 x 63 A, 3-pole 4 x 16 A, 1-pole	Neozed Fuse Sockets 2 x 63 A, 3-pole 4 x 16 A, 1-pole
Art.-No.	**Z 54.33**	**Z 54.34**	**Z 54.06**	**Z 54.19**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

SOCKET OUTLET COMBINATIONS SERIES 54

splash-proof IP44, pre-wired ready to connect

SERIES 54

HOUSING SIZE
W x H x D 260 x 461 x 195 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend

Cable Inlets: 1 x M50 top, 2 x M50 bottom

With window and
2 mounting rails for 2 x 10 HP
ART.-NO. B 54.01

Without window
ART.-NO. B 54.00

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	1 x 5/16 A + 1 x 5/32 A	2 x 5/16 A + 1 x 5/32 A	3 x 5/16 A 1 x 5/32 A	2 x 5/16 A 2 x 5/32 A
SCHUKO Sockets	4	4	3	3
FI Switches (RCCB)	1 x 4/40/0.03 A	1 x 4/63/0.03 A	1 x 4/63/0.03 A	1 x 4/63/0.03 A
LS Switch/Fuse	Neozed Fuse Sockets 1 x 63 A, 3-pole 1 x 16 A, 3-pole 4 x 16 A, 1-pole	1 x 32 A, 3-pole C 2 x 16 A, 3-pole C 4 x 16 A, 1-pole B	1 x 32 A, 3-pole C 3 x 16 A, 3-pole C 3 x 16 A, 1-pole B	2 x 32 A, 3-pole C 2 x 16 A, 3-pole C 3 x 16 A, 1-pole B
Art.-No.	**Z 54.15**	**Z 54.22**	**Z 54.32**	**Z 54.36**
Note:	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²
		Stock item		

				
Fitted with				
CEE Sockets	1 x 5/16 A + 1 x 5/32 A + 1 x 5/63 A	1 x 5/16 A + 1 x 5/32 A + 1 x 5/63 A	1 x 5/16 A + 1 x 5/32 A + 1 x 5/63 A	1 x 5/16 A + 1 x 5/32 A + 1 x 5/63 A
SCHUKO Sockets	2	2	2	2
FI Switches (RCCB)		1 x 4/63/0.03 A	1 x 4/63/0.03 A	1 x 4/63/0.03 A
LS Switch/Fuse	Neozed Fuse Sockets 2 x 63 A, 3-pole 1 x 16 A, 3-pole 2 x 16 A, 1-pole	1 x 63 A, 3-pole C 1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	Neozed Fuse Sockets 2 x 63 A, 3-pole 1 x 16 A, 3-pole LS Switch 2 x 16 A, 1-pole B	1 x Neozed fuse sockets 63 A, 3- pole LS Switch 1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole C
Art.-No.	**Z 54.45**	**Z 54.66**	**Z 54.67**	**Z 54.69**
Note:	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²

SOCKET OUTLET COMBINATIONS SERIES 59

splash-proof IP44, pre-wired ready to connect

SERIES 59

HOUSING SIZE
W x H x D 205 x 320 x 146 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend, flat cover

Cable Inlets: 1 x M32 top, 2 x M32 bottom

With window and mounting rail for 9 HP
ART.-NO. B 59.02

Without window
ART.-NO. B 59.00

Socket outlet Combination Options

		
Fitted with		
CEE Sockets		2 x 5/16 A
SCHUKO Sockets	6	
FI Switches (RCCB)		
LS Switch/Fuse	6 x 16 A, 1-pole B	2 x 16 A, 3-pole
Art.-No.	**Z 59.09**	**Z 59.40**
Note:	with clamping block 2x5x25 mm^2	with clamping block 2x5x25 mm^2

SOCKET OUTLET COMBINATIONS SERIES 59

splash-proof IP44, pre-wired ready to connect

SERIES 59

HOUSING SIZE
W x H x D 205 X 320 X 146 MM
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend, angled cover

Cable Inlets: 1 x M32 top, 2 x M32 bottom

With window and mounting rail for 9 HP
ART.-NO. B 59.03

Without window
ART.-NO. B 59.01

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	1 x 5/16 A	1 x 5/16 A	1 x 5/32 A	1 x 5/16 A
SCHUKO Sockets	2	2	2	3
FI Switches (RCCB)	4/40/0.03 A	4/40/0.03 A	4/40/0.03 A	
LS Switch/Fuse	1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	1 x 16 A, 3-pole C 2 x 16 A, 1-pole C	1 x 32 A, 3-pole C 2 x 16 A, 1-pole B	Neozed Fuse Sockets 1 x 16 A, 3-pole 3 x 16 A, 1-pole
Art.-No.	**Z 59.06**	**Z 59.16**	**Z 59.36**	**Z 59.01**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²
	Stock item			

				
Fitted with				
CEE Sockets	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A	2 x 5/16 A
SCHUKO Sockets	2	2	2	2
FI Switches (RCCB)			4/40/0.03 A	
LS Switch/Fuse	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole C	1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	2 x 16 A, 3-pole C 2 x 16 A, 1-pole B
Art.-No.	**Z 59.05**	**Z 59.25**	**Z 59.26**	**Z 59.02**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²
	Stock item	**Stock item**	**Stock item**	

SOCKET OUTLET COMBINATIONS SERIES 59

splash-proof IP44, pre-wired ready to connect

SERIES 59

HOUSING SIZE
W x H x D 205 x 320 x 146 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend, angled cover

Cable Inlets: 1 x M32 top, 2 x M32 bottom

With window and mounting rail for 9 HP
ART.-NO. B 59.03

Without window
ART.-NO. B 59.01

Socket outlet Combination Options

			
Fitted with			
CEE Sockets		2 x 5/16 A	3 x 5/16 A
SCHUKO Sockets		3	
FI Switches (RCCB)			
LS Switch/Fuse		2 x 16 A, 3-pole C 3 x 16 A, 1-pole B	3 x 16 A, 3-pole C
Art.-No.	**Z 59.32**	**Z 59.07**	**Z 59.08**
Note:		with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

SOCKET OUTLET COMBINATIONS SERIES 60

splash-proof IP44, pre-wired ready to connect

SERIES 60

HOUSING SIZE
W x H x D 260 x 319 x 146 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend, flat cover

Cable Inlets: top and bottom, 2 x M40 each

With window and mounting rail for 12 HP
ART.-NO. B 60.02

Without window
ART.-NO. B 60.00

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	4 x 5/16 A	4 x 5/32 A		
SCHUKO Sockets			6	8
FI Switches (RCCB)			6 x FI/LS 2/C16/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	4 x 16 A, 3-pole C	4 x 32 A, 3-pole C		8 x 16 A, 1-pole B
Art.-No.	**Z 60.22**	**Z 60.23**	**Z 60.30**	**Z 60.31**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

SOCKET OUTLET COMBINATIONS SERIES 60

For combination with housing Art. No. B 60.00 · splash-proof IP44, pre-wired ready to connect

SERIES 60

HOUSING SIZE
W x H x D 260 x 319 x 146 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend, flat cover

Cable Inlets: top and bottom, 2 x M40 each

With 2 windows and mounting rail for 2 x 12 HP
ART.-NO. B 60.04

Socket outlet Combination Options

Housing size for the entire combination 261 x 640 mm	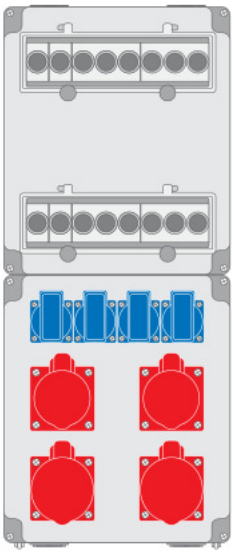	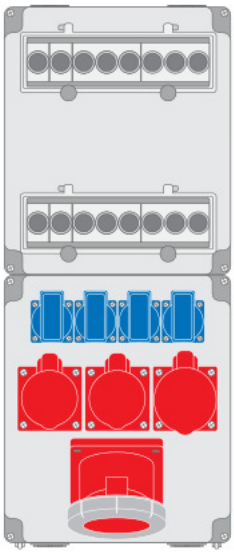	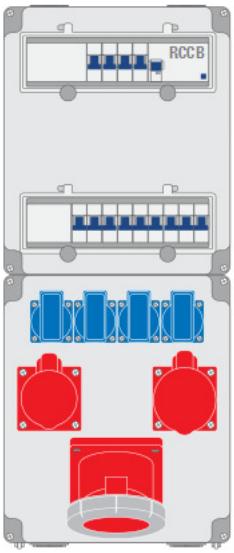
Fitted with			
CEE Sockets	2 x 5/16 A 2 x 5/32 A	2 x 5/16 A 1 x 5/32 A 1 x 5/63 A	1 x 5/16 A 1 x 5/32 A 1 x 5/63 A
SCHUKO Sockets	4	4	4
FI Switches (RCCB)			1 x 4/63/0.03 A
LS Switch/Fuse	Neozed Fuse Sockets 2 x 63 A, 3-pole 2 x 16 A, 3-pole 4 x 16 A, 1-pole	Neozed Fuse Sockets 2 x 63 A, 3-pole 2 x 16 A, 3-pole 4 x 16 A, 1-pole	1 x 63 A, 3-pole C 1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 4 x 16 A, 1-pole B
Art.-No.	**Z 60.27**	**Z 60.28**	**Z 60.38**
Note:	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²	with clamping block 2x5x25 mm²

SOCKET OUTLET COMBINATIONS SERIES 60

splash-proof IP44, pre-wired ready to connect

SERIES 60

HOUSING SIZE
W x H x D 260 x 319 x 146 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend, angled cover

Cable Inlets: top and bottom, 2 x M40 each

With window
and mounting rail for 12 HP
ART.-NO. B 60.03

Without window
ART.-NO. B 60.01

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	2 x 5/16 A	2 x 5/16 A	2 x 5/16 A	1 x 5/16 A + 1 x 5/32 A
SCHUKO Sockets	2	2	2	2
FI Switches (RCCB)	1 x 4/40/0.03 A	1 x 4/40/0.03 A		
LS Switch/Fuse	2 x 16 A, 3-pole C 2 x 16 A, 1-pole B	2 x 16 A, 3-pole C 2 x 16 A, 1-pole C	Neozed Fuse Sockets 2 x 16 A, 3-pole 2 x 16 A, 1-pole	Neozed Fuse Sockets 1 x 63 A, 3-pole 1 x 16 A, 3-pole 2 x 16 A, 1-pole
Art.-No.	**Z 60.02**	**Z 60.42**	**Z 60.03**	**Z 60.10**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²
	Stock item			**Stock item**

Socket Combination Options				
				
Fitted with				
CEE Sockets	2 x 5/16 A	2 x 5/16 A	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A
SCHUKO Sockets	4	4	4	4
FI Switches (RCCB)	1 x 4/40/0.03 A	1 x 4/40/0.03 A		1 x 4/63/0.03 A
LS Switch/Fuse	2 x 16 A, 3-pole C 2 x 16 A, 1-pole B	2 x 16 A, 3-pole C 2 x 16 A, 1-pole C	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 4 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B
Art.-No.	**Z 60.37**	**Z 60.47**	**Z 60.04**	**Z 60.34**
Note:	with clamping block 2 x 5 x 25 mm²		with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

SOCKET OUTLET COMBINATIONS SERIES 60

splash-proof IP44, pre-wired ready to connect

SERIES 60

HOUSING SIZE
W x H x D 260 x 319 x 146 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
PBT/PC-Blend, angled cover

Cable Inlets: top and bottom, 2 x M40 each

With window
and mounting rail for 12 HP
ART.-NO. B 60.03

Without window
ART.-NO. B 60.01

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	2 x 5/32 A	3 x 5/16 A	2 x 5/16 A 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A + 1 x 5/63 A
SCHUKO Sockets	4	3	4	2
FI Switches (RCCB)	1 x 4/40/0.03 A			
LS Switch/Fuse	2 x 32 A, 3-pole C 2 x 16 A, 1-pole B	3 x 16 A, 3-pole C 3 x 16 A, 1-pole B	1 x 32 A, 3-pole C 2 x 16 A, 3-pole C 2 x 16 A, 1-pole B	1 x 63 A, 3-pole C 1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B
Art.-No.	**Z 60.32**	**Z 60.01**	**Z 60.15**	**Z 60.06**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

	
Fitted with	
CEE Sockets	1 x 5/16 A + 1 x 5/32 A + 1 x 5/63 A
SCHUKO Sockets	2
FI Switches (RCCB)	1 x 4/63/0.03 A
LS Switch/Fuse	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B
Art.-No.	**Z 60.66**
Note:	with clamping block 2 x 5 x 25 mm²

COLORED SOCKET OUTLET COMBINATIONS SERIES 60

splash-proof IP44, pre-wired ready to connect

SERIES 60

HOUSING SIZE
W x H x D 260 x 319 x 146 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

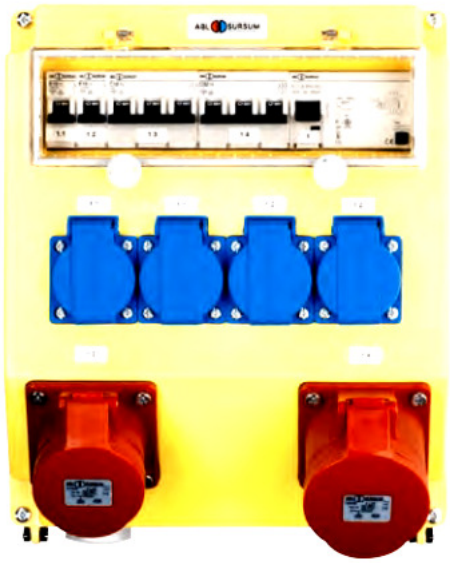

Socket outlet Combination Options

				
Fitted with				
CEE Sockets	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A
SCHUKO Sockets	2	2	4	4
FI Switches (RCCB)	1 x 4/40/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole C	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole C
Grey: Art. No.	**Z 60.16***	**Z 60.36***	**Z 60.14***	**Z 60.44**
Signal yellow: Art. No.	**Z60.16G**	**Z60.36G**	**Z60.14G**	**Z60.44G**
Silver: Art. No.	**Z60.16S**	**Z60.36S**	**Z60.14S**	**Z60.44S**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²
	***Stock item**	***Stock item**	***Stock item**	

WEATHER PROTECTION HOODS

For wall-mounting or freestanding installations

Weatherproofing

In conjunction with our weather protection hoods, our socket combinations are also perfectly suited for outdoor installation.

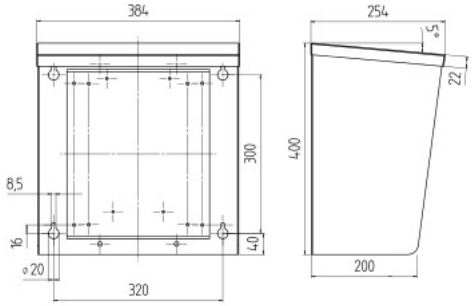

WEATHER PROTECTION HOODS

Stainless steel
dimensions W x H x D
384 x 400 x 254 / 200 mm
Pre-punched holes
for wall-mounting
Distributor Boxes (plastic)
Series 45, 59 and 60

ART.-NO. WSD60

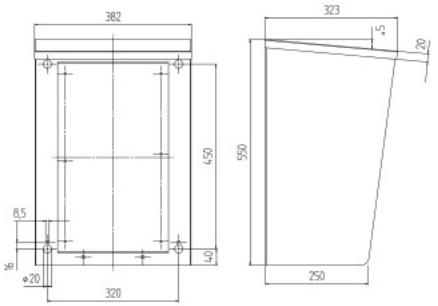

WEATHER PROTECTION HOODS

Stainless steel
dimensions W x H x D
382 x 550 x 323 / 250 mm
Pre-punched holes
for wall-mounting
Distributor Boxes (plastic)
Series 54

ART.-NO. WSD54

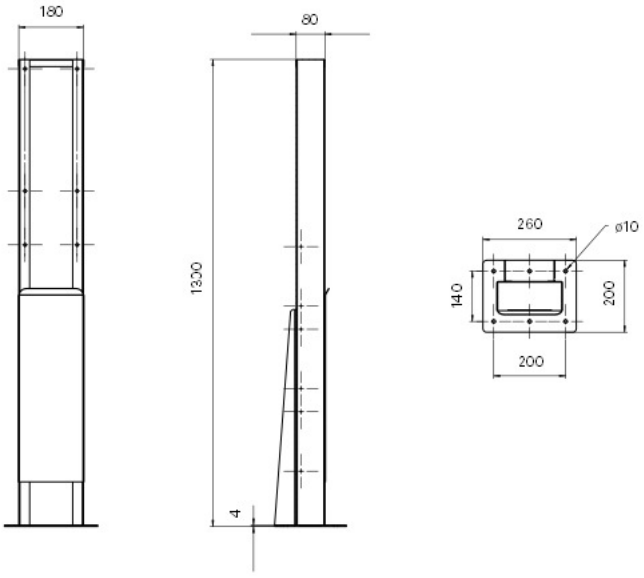

FREESTANDING POWER DISTRIBUTOR

Stainless steel
height 1300 mm
for weather protection hoods WSD60 and WSD54,
detachable, height adjustable cover plate, solid stainless steel base plate
260 x 200 mm with pre-drilled holes (ø 10 mm) for fast installation, additional bracing at the back for high stability

ART.-NO. STS5460

RUBBER WALL-MOUNTED DISTRIBUTION UNITS, HOUSING SERIES 88

splash-proof IP44, pre-wired ready to connect

SERIES 88

HOUSING SIZE
W x H x D 298 x 370 x 203 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
Solid rubber housing with protective lip
Housing cover hinged to housing base

Cable Inlets: top and bottom, 2 x M32 each

With window
and mounting rail for 13 HP
ART.-NO. B 88.01

Without window
ART.-NO. B 88.00

Rubber wall-mounted distribution units-Combination options

		
Fitted with		
CEE Sockets	1 x 5/16 A 1 x 5/32 A	1 x 5/16 A 1 x 5/32 A
SCHUKO Sockets	3	4
FI Switches (RCCB)	1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 3 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole C
Supply Cable		
Art.-No.	**Z 88.01**	**Z 88.02**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

RUBBER WALL-MOUNTED DISTRIBUTION UNITS, HOUSING SERIES 98

splash-proof IP44, pre-wired ready to connect

SERIES 98

HOUSING SIZE
W x H x D 370 x 370 x 203 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
Solid rubber housing with protective lip
Housing cover hinged to housing base

Cable Inlets: top and bottom, 2 x M40 each

With window and mounting rail for 17 HP
ART.-NO. B 98.01

Without window
ART.-NO. B 98.00

Rubber wall-mounted distribution units-Combination options

		
Fitted with		
CEE Sockets	2 x 5/16 A 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A 1 x 5/63 A
SCHUKO Sockets	4	3
FI Switches (RCCB)	1 x 4/63/0.03 A	1 x 4/63/0.03 A
LS Switch/Fuse	1 x 32 A, 3-pole C 2 x 16 A, 3-pole C 4 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 3 x 16 A, 1-pole B
Supply Cable		
Art.-No.	**Z 98.01**	**Z 98.02**
Note:	with clamping block 2 x 5 x 25 mm²	with clamping block 2 x 5 x 25 mm²

SWITCHABLE AND / OR FUSE-PROTECTED WALL-MOUNTED SOCKET OUTLETS

16 A AND 32 A VERSIONS

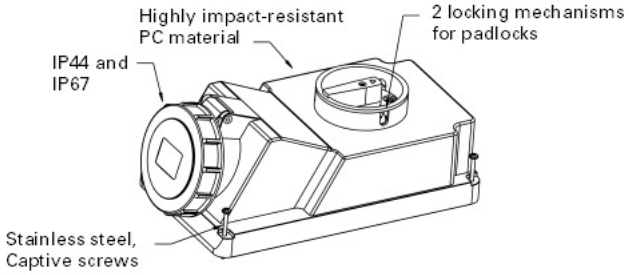

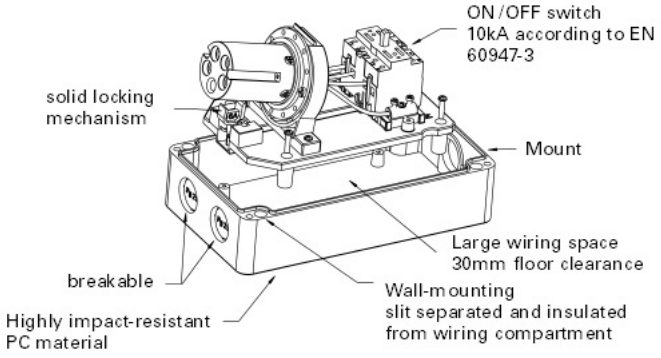

Specifications

- Wide range of models (16 to 63 A) available (16 A and 32 A; 3, 4 or 5 poles)
- 16 A and 32 A with loop-through wiring
- Some models with DIN Rail (EN50022) for 5 or 6 automatic safety switches and pre-wired up to the rail ON/OFF switch 10 kA according to EN 60947-3
- Locking mechanism
  Plug is locked
  After inserting and switching ON
  After switching OFF and unplugging, the switch is blocked
- Lockable in the OFF position (4mm padlock)
- Large wiring space
- Slit for wall-mounting separated and insulated from wiring compartment
- IP44 and IP67
- Checked according to EN 60309

Functional Characteristics

Switchable wall-mounted or side-mounted base box

- Standard configuration, compact design
- PC/ABS wall socket outlet
- Compact and space-saving design
- Flanged version available
- Padlock lockable
- Locking mechanism
- Large wiring space
  Cable Inlets top and bottom
- 16 A and 32 A with loop-through wiring
- Pre-wired ready to connect

CEE SWITCHED INTERLOCKED WALL-MOUNTED SOCKET OUTLETS



NUMBER OF POLES	3	4	5	3	4	5
AMPERE	16			32		
a	90	90	90	90	90	90
b	180	180	180	180	180	180
c	115	116	117	123	123	124
Switching Contacts	2	3	4	2	3	4
Gewicht [g/Stück]	596	657	695	654	712	754

WALL-MOUNTED SOCKET OUTLET

splash-proof IP44

- Locking mechanism
- Padlock lockable
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
16	3	C31S101	C31S201	C31S301		C31S501	1
16	4	C41S101	C41S201	C41S301	C41S401	C41S501	1
16	5	C51S101	C51S201	C51S301		C51S501	1
32	3	C32S101	C32S201	C32S301		C32S501	1
32	4	C42S101	C42S201	C42S301	C42S401	C42S501	1
32	5	C52S101	C52S201	C52S301		C52S501	1



NUMBER OF POLES	3	4	5	3	4	5
AMPERE	16			32		
a	90	90	90	90	90	90
b	180	180	180	180	180	180
c	119	120	122	125	125	128
Switching Contacts	2	3	4	2	3	4
Gewicht [g/Stück]	596	657	695	654	712	754

WALL-MOUNTED SOCKET OUTLET

waterproof IP67

- Locking mechanism
- Padlock lockable
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
16	3	C31S151	C31S251	C31S351		C31S551	1
16	4	C41S151	C41S251	C41S351	C41S401	C41S551	1
16	5	C51S151	C51S251	C51S351		C51S551	1
32	3	C32S151	C32S251	C32S351		C32S551	1
32	4	C42S151	C42S251	C42S351	C42S451	C42S551	1
32	5	C52S151	C52S251	C52S351		C52S551	1

CEE SWITCHED INTERLOCKED WALL-MOUNTED SOCKET OUTLETS

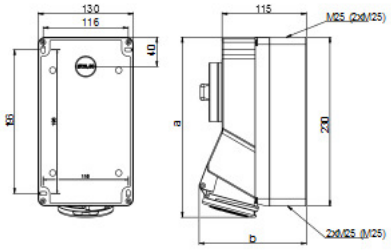

NUMBER OF POLES	3	4	5	3	4	5
AMPERE	16			32		

a	248	249	250	253	253	254
b	146	146	146	150	150	157
M	3x25	3x25	3x25	3x25	3x25	3x25
Switching Contacts	2	3	4	2	3	4
Weight [g/each]	1123	1143	1183	1203	1213	1263

WALL-MOUNTED SOCKET OUTLET

splash-proof IP44

- Locking mechanism
- Padlock lockable
- Top, bottom and rear cable inlets
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
16	3	C31S102	C31S202	C31S302		C31S502	1
16	4	C41S102	C41S202	C41S302	C41S402	C41S502	1
16	5	C51S102	C51S202	C51S302		C51S502	1
32	3	C32S102	C32S202	C32S302		C32S502	1
32	4	C42S102	C42S202	C42S302	C42S402	C42S502	1
32	5	C52S102	C52S202	C52S302		C52S502	1

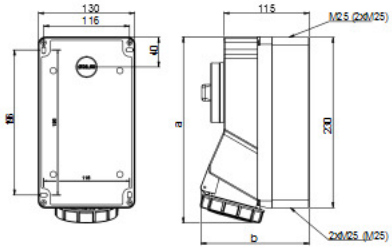

NUMBER OF POLES	3	4	5	3	4	5
AMPERE	16			32		

a	248	249	250	253	253	254
b	146	146	146	150	150	157
M	3x25	3x25	3x25	3x25	3x25	3x25
AC 22A	20 A	20 A	20 A	32 A	32 A	32 A
Switching Contacts	2	3	4	2	3	4
Weight [g/each]	1130	1150	1190	1210	1220	1270

WALL-MOUNTED SOCKET OUTLET

waterproof IP67

- Locking mechanism
- Padlock lockable
- Top, bottom and rear cable inlets
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
16	3	C31S152	C31S252	C31S352		C31S552	1
16	4	C41S152	C41S252	C41S352	C41S452	C41S552	1
16	5	C51S152	C51S252	C51S352		C51S552	1
32	3	C32S152	C32S252	C32S352		C32S552	1
32	4	C42S152	C42S252	C42S352	C42S452	C42S552	1
32	5	C52S152	C52S252	C52S352		C52S552	1

CEE SWITCHED INTERLOCKED WALL-MOUNTED SOCKET OUTLETS



NUMBER OF POLES	3	4	5
AMPERE	63		

a	310	310	310
b	195	195	195
AC 22 A	63 A	63 A	63 A
Switching Contacts	2	3	4
Weight [g/each]	1810	1944	2083

WALL-MOUNTED SOCKET OUTLET
waterproof IP67

- HighPower version
- Locking mechanism
- Padlock lockable
- Housing reversible 180°
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
63	3	C33S153	C33S253	C33S353		C33S553	1
63	4	C43S153	C33S253	C43S353	C43S453	C43S553	1
63	5	C53S153	C33S253	C53S353		C53S553	1

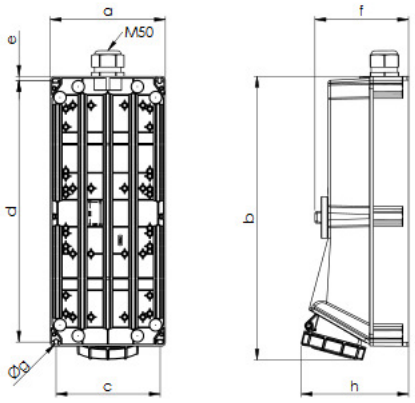

NUMBER OF POLES	3	4	5
AMPERE	125		

a	222	222	222
b	547	547	547
c	201	201	201
d	505	505	505
e	9	9	9
f	182	182	182
ø g	6.5	6.5	6.5
h	209	209	209
AC 22 A	125	125	125
Switching Contacts	2	3	4
Weight [g/each]	4000	4260	4600

WALL-MOUNTED SOCKET OUTLET
waterproof IP67

- HighPower version
- Locking mechanism
- Padlock lockable
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
125	3	-	-	-		-	1
125	4	-	-	C44S354	-	-	1
125	5	-	-	C54S354		-	1

CEE SWITCHED INTERLOCKED WALL-MOUNTED SOCKET OUTLETS

With DIN Rail



NUMBER OF POLES	3	4	5	3	4	5
AMPERE	16			32		
a	358	359	360	363	363	364
b	146	146	146	150	150	157
M	3x25	3x25	3x25	3x25	3x25	3x25
AC 22 A	20 A	20 A	20 A	32 A	32 A	32 A
Switching Contacts	2	3	4	2	3	4
Weight [g/each]	1483	1603	1643	1663	1673	1723

WALL-MOUNTED SOCKET OUTLET WITH DIN RAIL

splash-proof IP44

- Locking mechanism
- Padlock lockable
- Top, bottom and rear cable inlets
- With DIN Rail and clear cover for 5 modules
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
16	3	C31S110	C31S210	C31S310		C31S510	1
16	4	C41S110	C41S210	C41S310	C41S410	C41S510	1
16	5	C51S110	C51S210	C51S310		C51S510	1
32	3	C32S110	C32S210	C32S310		C32S510	1
32	4	C42S110	C42S210	C42S310	C42S410	C42S510	1
32	5	C52S110	C52S210	C52S310		C52S510	1

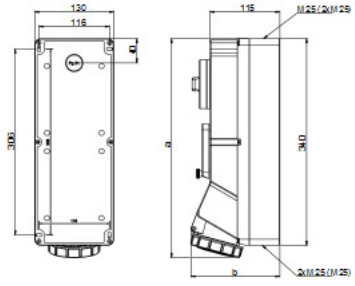

NUMBER OF POLES	3	4	5	3	4	5
AMPERE	16			32		
a	358	359	360	363	363	364
b	146	146	146	150	150	157
M	3x25	3x25	3x25	3x25	3x25	3x25
AC 22 A	20 A	20 A	20 A	32 A	32 A	32 A
Switching Contacts	2	3	4	2	3	4
Weight [g/each]	1590	1610	1650	1670	1680	1730

WALL-MOUNTED SOCKET OUTLET WITH DIN RAIL

waterproof IP67

- Locking mechanism
- Padlock lockable
- Top, bottom and rear cable inlets
- With DIN Rail and clear cover for 5 modules
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
16	3	C31S160	C31S260	C31S360		C31S560	1
16	4	C41S160	C41S260	C41S360	C41S460	C41S560	1
16	5	C51S160	C51S260	C51S360		C51S560	1
32	3	C32S160	C32S260	C32S360		C32S560	1
32	4	C42S160	C42S260	C42S360	C42S460	C42S560	1
32	5	C52S160	C52S260	C52S360		C52S560	1

CEE SWITCHED INTERLOCKED WALL-MOUNTED SOCKET OUTLETS

With DIN Rail





NUMBER OF POLES	3	4	5
AMPERE		63	

a	496	496	496
b	195	195	195
AC 22 A	63 A	63 A	63 A
Switching Contacts	2	3	4
Weight [g/each]	3107	3241	3380

WALL-MOUNTED SOCKET OUTLET WITH DIN RAIL

waterproof IP67

- HighPower version
- Locking mechanism
- Padlock lockable
- Top and bottom cable inlets
- with DIN Rail EN50022 for all common fuse types (LS, FI. ...)
- Pre-wired up to DIN Rail
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
63	3	C33S160	C33S260	C33S360		C33S560	1
63	4	C43S160	C33S260	C43S160	C43S460	C43S560	1
63	5	C53S160	C33S260	C53S160		C53S560	1

CEE WALL-MOUNTED SOCKET OUTLETS WITH PROTECTION



NUMBER OF POLES	3	4	5	3	4	5
AMPERE	16			32		
a	248	249	250	253	253	254
b	146	146	146	150	150	157
M	3x25	3x25	3x25	3x25	3x25	3x25
Weight [g/each]	1048	1057	1087	1125	1125	1162

WALL-MOUNTED SOCKET OUTLET
splash-proof IP44

- Locking mechanism
- Padlock lockable
- Top, bottom and rear cable inlets
- With DIN Rail and clear cover for 5 modules
- All components fixed to the top section

VOLTAGE	110 V~	230 V~	400 V~	440 V~	500 V~
FREQUENCY	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz	50/60 Hz
DESIG-NATION	4h	3p = 6h 4p/5p = 9h	3p = 9h 4p/5p = 6h	11h	7h

AMPERE	POLES	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	ART.-NO.	PACKING UNIT
16	3	B31S10	B31S20	B31S30		B31S50	1
16	4	B41S10	B41S20	B41S30	B41S40	B41S50	1
16	5	B51S10	B51S20	B51S30		B51S50	1
32	3	B32S10	B32S20	B32S30		B32S50	1
32	4	B42S10	B42S20	B42S30	B42S40	B42S50	1
32	5	B52S10	B52S20	B52S30		B52S50	1



NUMBER OF POLES	5	5
AMPERE	16	32
a	250	254
b	146	157
M	3x25	3x25
Weight [g/each]	1087	1162

WALL-MOUNTED SOCKET OUTLET
waterproof IP67

- Locking mechanism
- Padlock lockable
- Top, bottom and rear cable inlets
- With DIN Rail and clear cover for 5 modules
- All components fixed to the top section

VOLTAGE	400 V~
FREQUENCY	50/60 Hz
DESIG-NATION	5p = 6h

AMPERE	POLES	ART.-NO.	PACKING UNIT
16	5	B51S35	1
32	5	B52S35	1

CEE SOCKET OUTLET COMBINATIONS

Power Inlets for Transportable Site Offices



SOCKET OUTLET COMBINATIONS

splash-proof IP44

- Housing Size W x H x D 225 x 118 x 131 mm (without additions)
- Cable Inlets: 2 x M25 on each side
- Clock setting 6h
- Choice of 2 standard combinations

Socket Combination Options

		
Fitted with		
Sockets	1 x 5/16 A	1 x 5/32 A
SCHUKO Sockets		
FI Switches (RCCB)		
LS Switch/Fuse		
Feed plugs	1 x 5/16 A	1 x 5/32 A
Art.-No.	**Z 57.16**	**Z 57.36**
Note:		

Outside diameters of common cable sections*
What is the diameter of a NYY 4 x 6? Does it still fit into a M25 cable clamp or do you need a 32? The following tables will assist you in selecting the correct sizes.

CABLE SECTION [mm²]	NYM	NYY	H07RN-F
	CABLE DIAMETER IN mm		
1 x 10	8.4-9.5	10.0-10.5	–
1 x 16	9.9-11	11-12	–
1 x 25	–	13-14	–
1 x 35	–	14-15	–
3 x 1.5	9.1-10.5	12.0-12.5	8.0-10.4
3 x 2.5	10.4-11	13	9.6-12.4
3 x 4	11.9-13	15-16	12.7-16.2
3 x 6	13.4-15	16-17	14.1-18.0
3 x 10	–	18-19	19.1-24.2
4 x 1.5	9.8-11	13.0-13.5	9.0-11.6
4 x 2.5	11.3-12.5	14.0-14.5	10.7-13.8
4 x 4	13.8-14.5	16.0-17.5	14.0-17.9
4 x 6	15.1-16.5	17-18	15.7-20.0
4 x 10	17.9-18.5	19-20	20.9-26.5
4 x 16	22.0-23.5	22-23	23.8-30.1
4 x 25	26.9-28.5	28	28.9-36.6
4 x 35	–	26-30	32.5-41.1
4 x 50	–	30-35	37.7-47.5
4 x 70	–	34-40	42.7-54.0
5 x 1.5	10.8-12	14-15	9.8-12.7
5 x 2.5	12.2-13.5	15-16	11.9-15.3
5 x 4	14.9-15.5	16.5-17	15.6-16.9
5 x 6	16.3-18	19	17.5-22.2
5 x 10	19.5-20	21	22.9-29.1
5 x 16	24.4-26	24	26.4-33.3
5 x 25	29.4-31.5	–	32.0-40.4
7 x 1.5	11.5-13	15-16	14.0-17.5
7 x 2.5	13.1-14.5	16.0-16.5	16.5-20.0

Cable and Conduit Abbreviations
NYM Sheathed Cable
NYY Cable with plastic sheath
H07RN-F Rubber-sheathed cable

Cable Glands Selection Table*

CABLE SECTION [mm²]	NYM	NYY	H07RN-F
1 x 10	M16	M20	–
1 x 16	M20	M20	–
1 x 25	–	M20	–
1 x 35	–	M25	–
3 x 1.5	M20	M20	M16
3 x 2.5	M25	M20	M20
3 x 4	M25	M25	M25
3 x 6	M25	M25	M32
3 x 10	–	M32	M40
4 x 1.5	M20	M25	M25
4 x 2.5	M20	M25	M25
4 x 4	M25	M25	M32
4 x 6	M25	M32	M32
4 x 10	M32	M32	M40
4 x 16	M40	M40	M50
4 x 25	M50	M50	M63
4 x 35	–	M50	M63
4 x 50	–	M50	M63 *
4 x 70	–	M63	M63 *
5 x 1.5	M20	M25	M20
5 x 2.5	M25	M25	M25
5 x 4	M25	M32	M32
5 x 6	M32	M32	M32
5 x 10	M40	M40	M40
5 x 16	M40	M40	M50
5 x 25	M50	–	M63
7 x 1.5	M25	M25	M32
7 x 2.5	M25	M32	M32

*) All values are averages (subject to change!)

Clamping sites for metric cable Glands*

Our wall-mounted distributor boxes feature grommets and plugs as standard. Of course we will also fit cable clamps on request.

SIZE	CABLE CLAMP CLAMPING AREA [mm]	GROMMETS INLET [mm]
M12	3.5-7	–
M16	4.5-10	5-10
M20	7-13	8-13.5
M25	9-17	9-16
M32	11-21	11-22
M40	19-28	17-34
M50	27-34.5	22-35
M63	34-45	24-43

Grommets:

- For ordinary installations without special requirements
- Without strain relief
- IP54 Protection rating

Cable Glands:

- Integrated strain relief
- Large sealing and clamping area
- IP68 – 5 bar (30 min) Protection rating

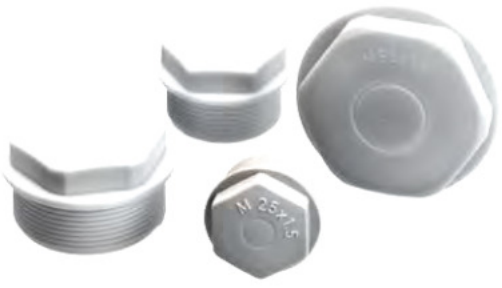

MOBILE SOCKET OUTLET COMBINATIONS
MODULAR SYSTEM

SINGLE SUPPLIER SOLUTIONS We manufacture all the components for our Socket Outlet Combinations ourselves. This way we can guarantee the highest quality as well as flexible solutions through individually tailored combinations. You can find a planning template in the Downloads section of our website www.abl-sursum.com. Please direct any queries to kombis@abl-sursum.com or call +49(0) 9123/188-164, 126.

MINIATURE CIRCUIT BREAKERS AND RESIDUAL CURRENT CIRCUIT BREAKERS

Miniature Circuit Breakers
- Switching capabilities 6/10 kA,
- B, C, D, K and Z characteristics

Residual Current Devices
- Type A (pulsating current sensitive)
- Type B (universal current sensitive)

RAIL-MOUNTED DEVICES

- Switches, Buttons, Indicator Lights
- Mechanical and Electronic Relays and Remote Switches
- Grid Monitoring, Installation Contactors
- Timers
- Safety Transformers

SCHUKO SOCKET OUTLETS

SCHUKO®

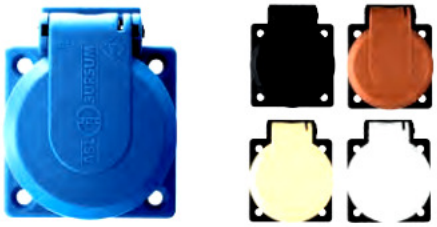

- Self-closing, hinged lid
- Range of protection ratings
- Shatter-proof thermoplastics
- Range of colors

INTERNATIONAL STANDARD SOCKET OUTLETS

for Belgium, France, Czech Republic, Poland, Switzerland, USA, Canada, United Kingdom, China, Australia

PANEL MOUNTED SOCKET OUTLETS

- with Range of voltages and protection ratings acc. to UL and IEC
- Feed plugs

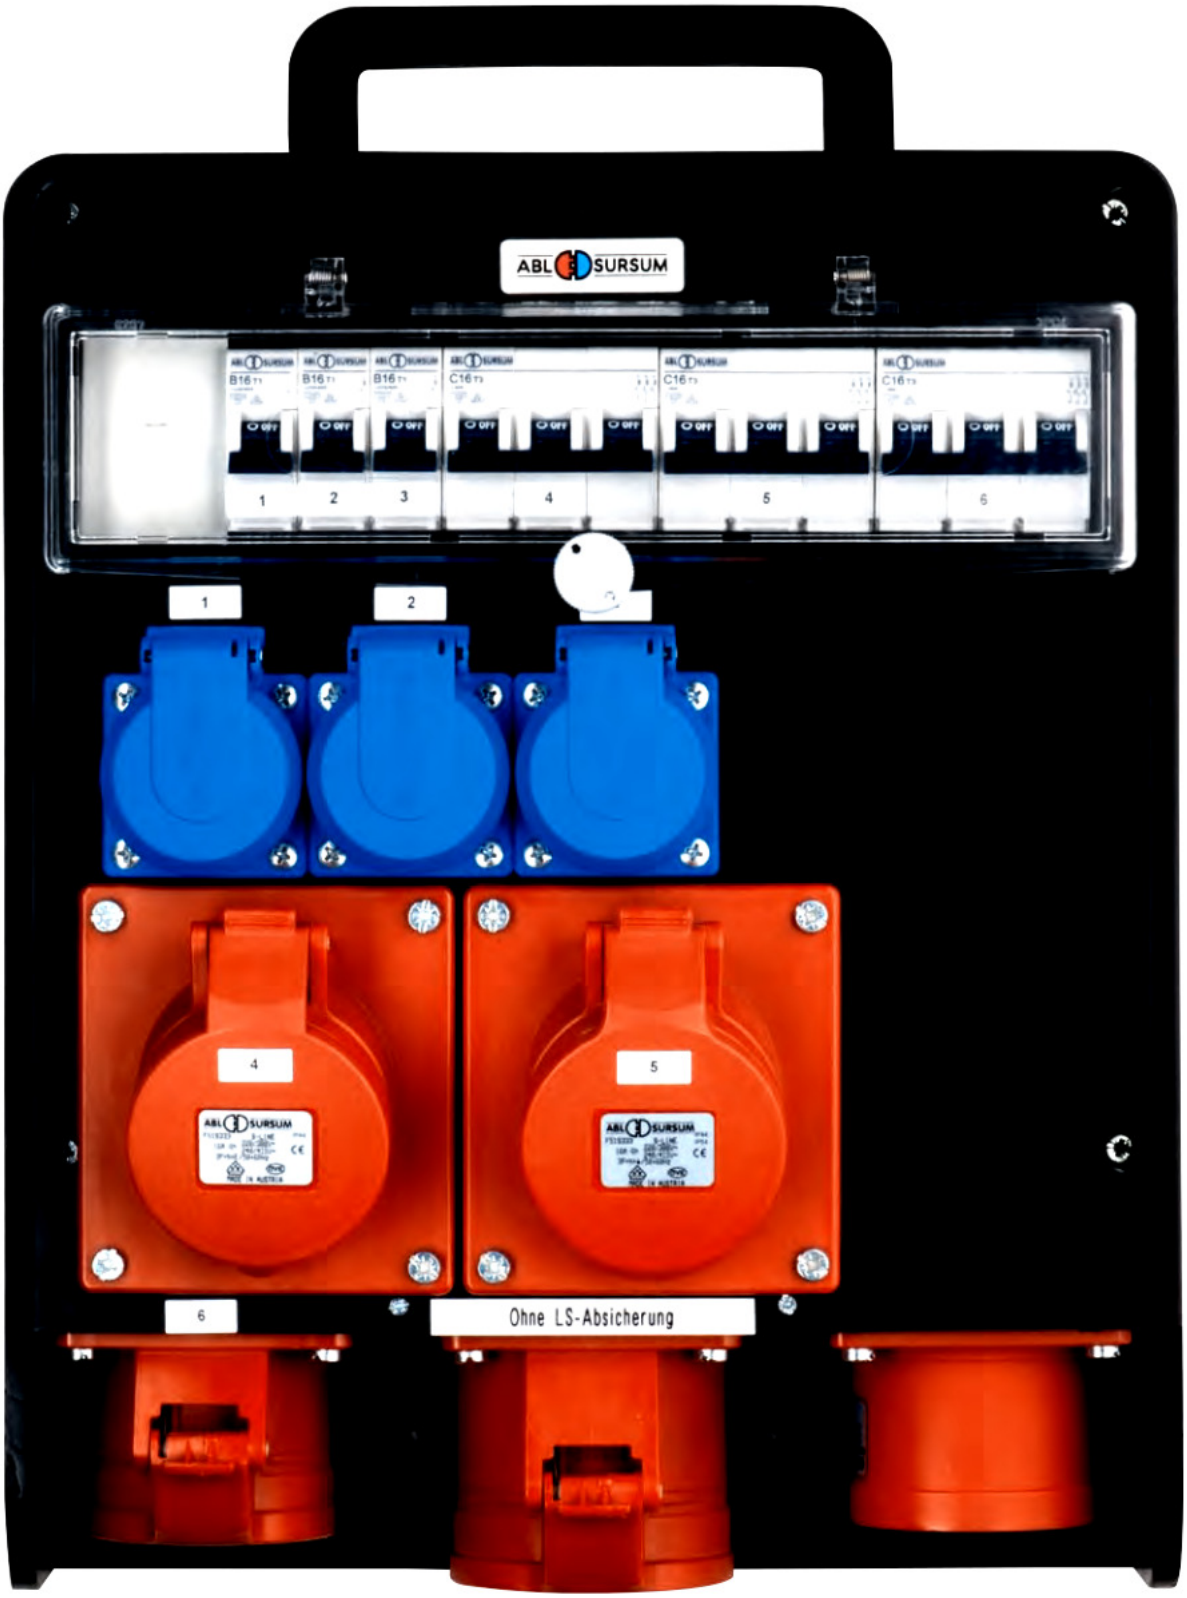
ABL SURSUM
B16
B16
B16
C16
C16
C16
1
2
3
4
5
6
1
2
4
5
6
Ohne LS-Absicherung

MOBILE SOCKET COMBINATIONS

Overview

1 POWER CUBES

Power supply from above for workshops and industrial work sites – offers shorter connecting distances to power/pneumatic tools. With CEE-/SCHUKO sockets, international standard outlets, data sockets, compressed air outlets etc. Power supply easily connected using the pre-installed clamping block.

2 PORTABLE SOCKET OUTLET BOXES

Your flexible solution for mobile applications
Range of housing materials and sizes
With practical handle for easy transport and relocation.

3 SOCKET OUTLET RAILS

Handy power distribution through small dimensions, robust rubber housing, flexible supply cable and SCHUKO or CEE sockets. Also available with Ground Fault Protection, external voltage detection and under-voltage release.

4 RUBBER FREE-STANDING DISTRIBUTION UNITS

Heavy-duty, high-quality housing materials and a large base plate ensure stability and safety. The strong handle makes transport easy and stores the supply cable.
Ground clearance to keep moisture out.
Available in orange, black or as **EVENT**LINE version (p.302).

5 PLASTIC HOUSINGS

Range of 6 different housing series (thermoplastic):

- Temperature and impact resistant
- Weather, UV and ozone resistant
- Free of halogens
- Outstanding tracking resistance
- Resistant to a wide range of chemicals

6 SOLID RUBBER HOUSING

2 Series of solid rubber housings:

- Unbreakable, impact resistant and long-lasting
- Free of halogens
- Low flammability and self-extinguishing
- Resistant to welding and other flying sparks
- Oil, grease, acid and gasoline resistant

MOBILE SOCKET COMBINATIONS

SERIES 30 POWER CUBE

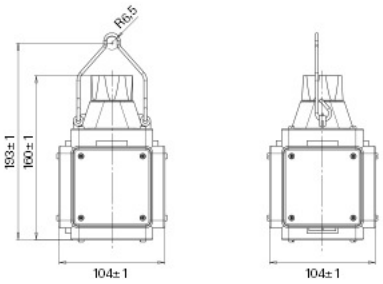

SERIES 45 PLASTIC SOCKET OUTLET CASE

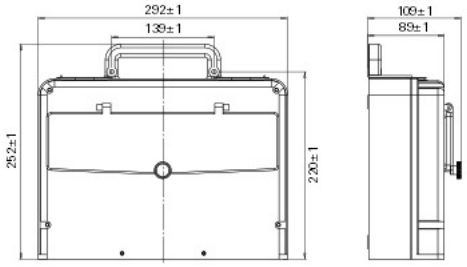

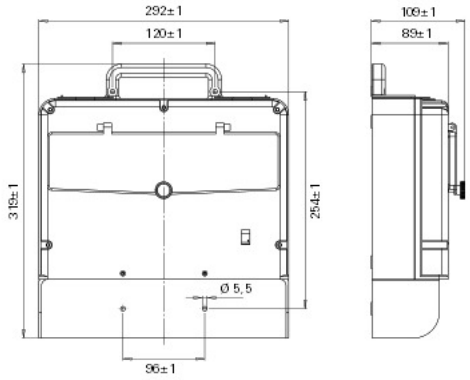

SERIES 55 PLASTIC SOCKET OUTLET CASE

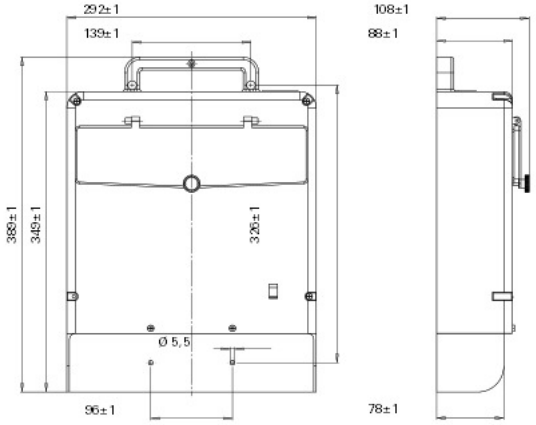

MOBILE SOCKET COMBINATIONS

SERIES 48

RUBBER POWER STRIP

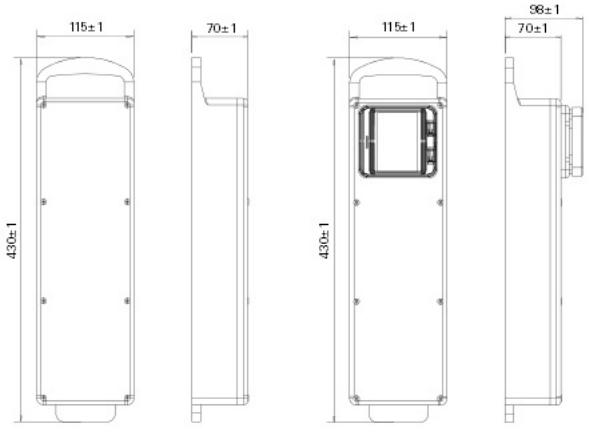

SERIES 58

RUBBER SOCKET OUTLET CASE

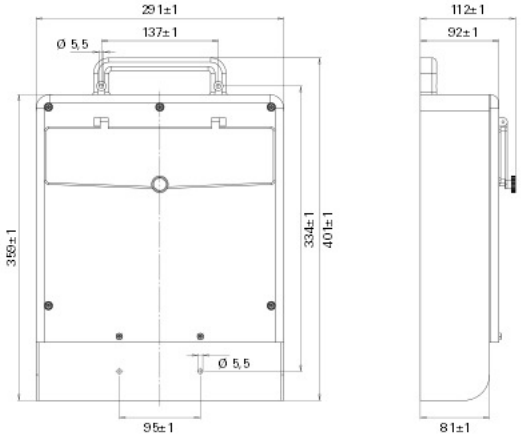

SERIES 73

PLASTIC SOCKET OUTLET CASE

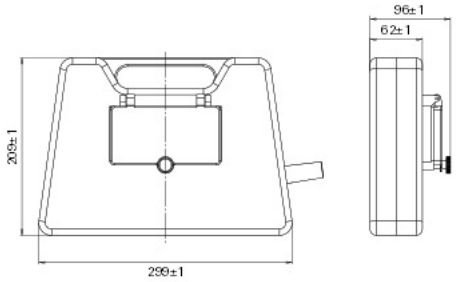

MOBILE SOCKET COMBINATIONS

SERIES 68

FREE-STANDING SOLID RUBBER OUTLET

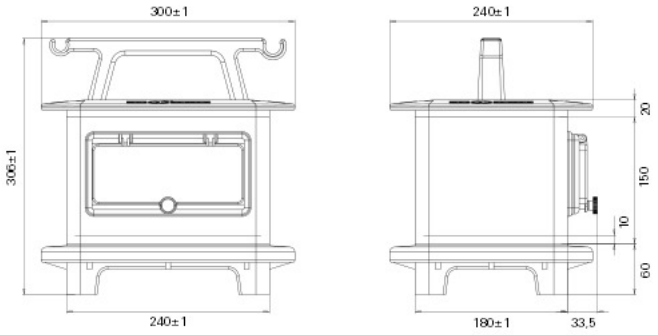

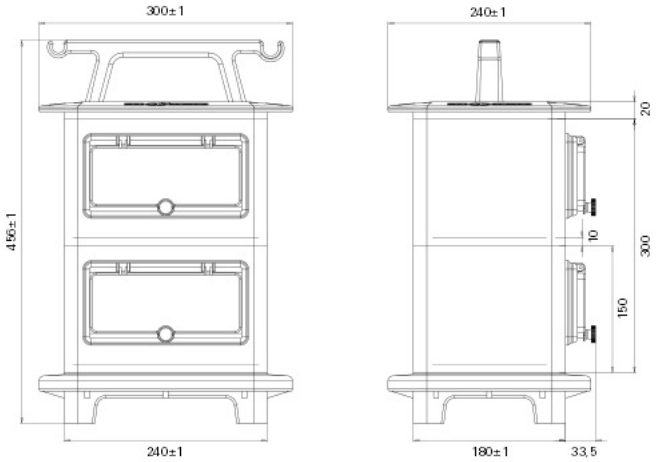

SERIES
78

FREE-STANDING SOLID RUBBER OUTLET

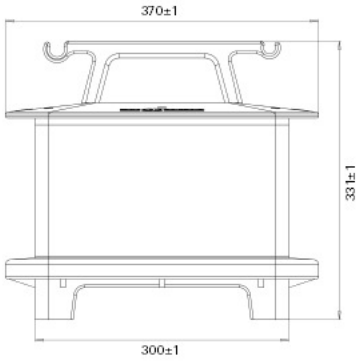

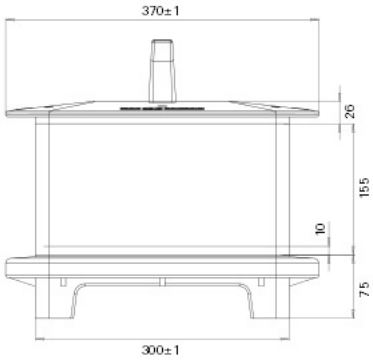

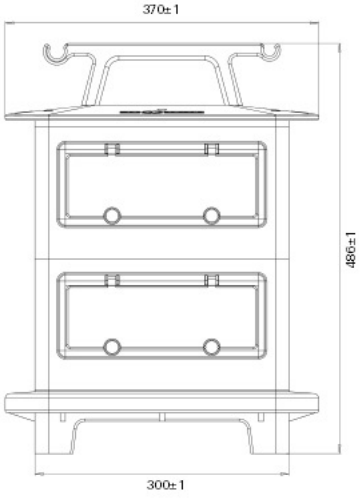

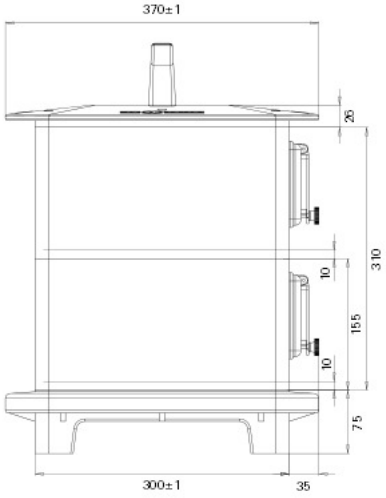

SERIES 30

HOUSING SIZE
WXHXD 104 x 104 x 193 mm
(incl. hanger, without attachments)

Additional Power Cubes with higher protection ratings, e.g. IP67 and/or with data sockets are available on request.

HOUSING ONLY

Screwed cable inlet for cables 3 x 1,5 to 5 x 6 mm²
max. 19 mm diameter

Cubes are fitted with strain relief and 5 x 6 mm ² clamping block

ART.-NO. Z 30.10

Power Cube Connection Possibilities

	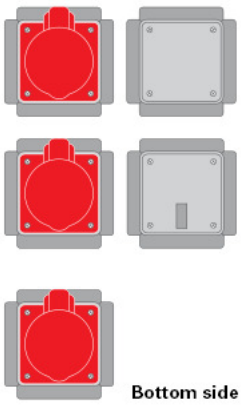 Bottom side	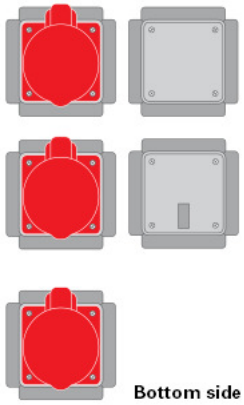 Bottom side	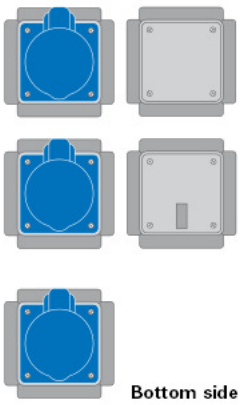 Bottom side	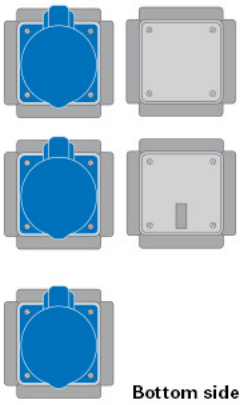 Bottom side
Fitted with				
CEE Sockets	3 x 5/16 A	3 x 5/32 A	3 x 3/16 A	3 x 3/32 A
SCHUKO Sockets				
Compressed Air Connector				
Art.-No.	**3E51.34**	**3E52.34**	**3E31.24**	**3E32.23**
Note:	**Stock Item**			

	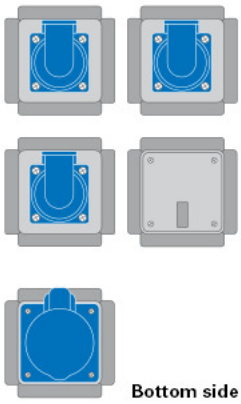 Bottom side	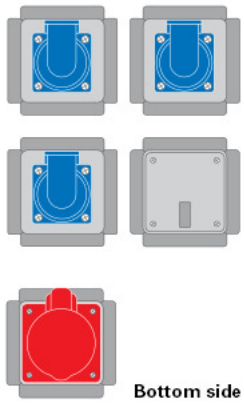 Bottom side	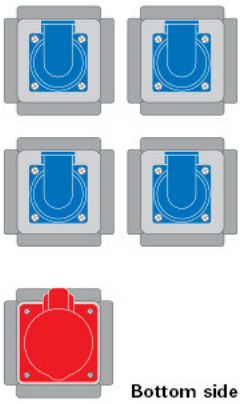 Bottom side	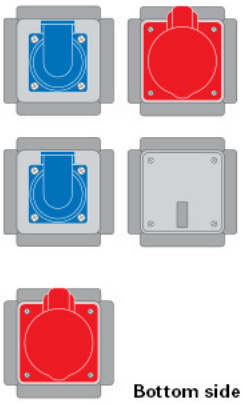 Bottom side
Fitted with				
CEE Sockets	1 x 3/16 A	1 x 5/16 A	1 x 5/16 A	2 x 5/16 A
SCHUKO Sockets	3	3	4	2
Compressed Air Connector				
Art.-No.	**Z 30.01**	**Z 30.02**	**Z 30.05**	**Z 30.06**
Note:		**Stock Item**	**Stock Item**	**Stock Item**

SERIES 30

COVER PANEL WITH HOOK
for Power Cube

ART.-NO. 8899749

COVER PANEL
for Power Cube

ART.-NO. 8899759

ADAPTER PANEL
for Power Cube

ART.-NO. 8899779

COMPRESSED AIR CONNECTOR
mounted on cover panel · ½" inlet and 2 x ½" outlets
ART.-NO. ZDL304

Power Cube Connection Possibilities

	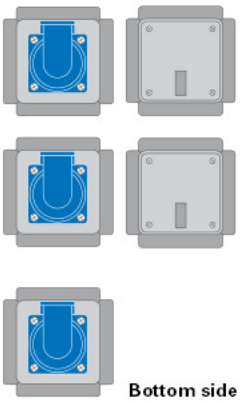 Bottom side	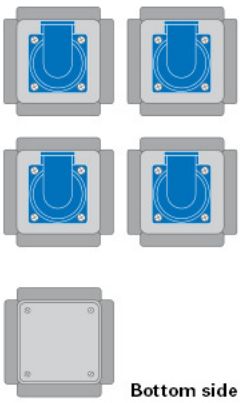 Bottom side	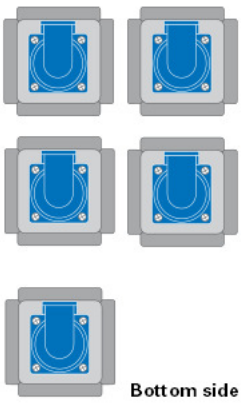 Bottom side	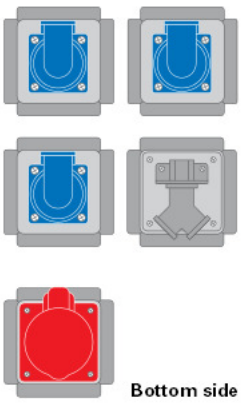 Bottom side
Fitted with				
CEE Sockets				1 x 5/16 A
SCHUKO Sockets	3	4	5	3
Compressed Air Connector				½" inlet and 2 x ½" outlets
Art.-No.	**3E 1561**	**4E 1561**	**5E 1561**	**ZL30.02**
Note:	**Stock Item**	**Stock Item**		**Stock Item**

	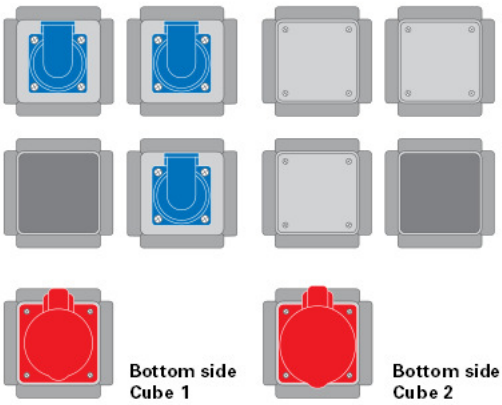 Bottom side Cube 1 Bottom side Cube 2
Fitted with	
CEE Sockets	1 x 5/32 A 1 x 5/16 A
SCHUKO Sockets	3
Ethernet Sockets	
Art.-No.	**ZT30.08**
Note:	**For twin supply cables**

PLASTIC SOCKET OUTLET CASE

SERIES
45

BOX SIZE
W x H x D 292 x 294 x 109 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
With mounting rail for 13 HP

ART.-NO. B 45.03

Plastic Socket Outlet Case Combinations

		
Fitted with		
CEE Sockets		1 x 5/32 A 1 x 5/16 A
SCHUKO Sockets	5	2
FI Switch (RCCB)	1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	5 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B
Supply Cable	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A	2 m H07RN-F 5x6mm² with CEE Plug 5/32 A
Art.-No.	**Z 45.11**	**Z 45.12**
Note:	**Stock Item**	

PLASTIC SOCKET OUTLET CASE

SERIES
45

BOX SIZE
W x H x D 292 x 318 x 109 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
With apron and mounting rail for 13 HP

For CEE Feed Plug 5/16 A
ART.-NO. B 45.01

For CEE Feed Plug 5/32 A
ART.-NO. B 45.02

Plastic Socket Outlet Case Combinations

				
Fitted with				
CEE Sockets	2 x 5/16 A	1 x 5/32 A + 1 x 5/16 A	2 x 5/16 A + 1 x 3/16 A	1 x 5/32 A + 1 x 5/16 A
SCHUKO Sockets	3	3	4	3
FI Switch (RCCB)	1 x 4/40/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	2 x 16 A, 3-pole C 3 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 3 x 16 A, 1-pole B	2 x 16 A, 3-pole C 1 x 16 A, 1-pole C 2 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 3 x 16 A, 1-pole B
Supply Cable			2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A	2 m H07RN-F 5x6mm² with CEE Plug 5/32 A
Power Supply	Appliance Plug 5/16 A	Appliance Plug 5/32 A		
Art.-No.	**Z 45.13**	**Z 45.14**	**Z 45.15**	**Z 45.16**
Note:				

PLASTIC SOCKET OUTLET CASE

SERIES
55

BOX SIZE
W x H x D 292 x 389 x 108 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
With apron and mounting rail for 13 HP

For CEE Feed Plug 5/16 A
ART.-NO. B 55.01

For CEE Feed Plug 5/32 A
ART.-NO. B 55.02

Plastic Socket Outlet Case Combinations

				
Fitted with				
CEE Sockets	2 x 5/16 A 1 x 3/16 A	1 x 5/16 A	1 x 5/32 A 1 x 5/16 A	1 x 5/32 A + 2 x 5/16 A + 1 x 3/16 A
SCHUKO Sockets	5	6	6	5
FI Switch (RCCB)	1 x 4/25/0.03 A	1 x 4/25/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	1 x 16 A, 3-pole C 3 x 16 A, 1-pole C	1 x 16 A, 3-pole C 3 x 16 A, 1-pole C	1 x 16 A, 3-pole C 6 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 3 x 16 A, 1-pole C
Supply Cable	2 m H07RN-F 5x2.5mm^2 with CEE Plug 5/16 A	2 m H07RN-F 5x2.5mm^2 with CEE Plug 5/16 A	2 m H07RN-F 5x6mm^2 with CEE Plug 5/32 A	2 m H07RN-F 5x6mm^2 with CEE Plug 5/32 A
Power Supply				
Art.-No.	**Z 55.12**	**Z 55.16**	**Z 55.18**	**Z 55.17**
Note:		**Stock Item**		

				
Fitted with				
CEE Sockets	2 x 5/16 A	1 x 5/32 A 1 x 5/16 A	1 x 5/32 A 3 x 5/16 A	
SCHUKO Sockets	6	6	3	9
FI Switch (RCCB)	1 x 4/25/0.03 A	1 x 4/40/0.03 A		1 x 4/40/0.03 A
LS Switch/Fuse	1 x 16 A, 3-pole C 3 x 16 A, 1-pole B	1 x 16 A, 3-pole C 3 x 16 A, 1-pole B	3 x 16 A, 3-pole C 3 x 16 A, 1-pole B	9 x 16 A, 1-pole B
Supply Cable				
Power Supply	Appliance Plug 5/16 A	Appliance Plug 5/32 A	Appliance Plug 5/32 A	Appliance Plug 5/32 A
Art.-No.	**Z 55.72**	**Z 55.48**	**Z 55.74**	**Z 55.75**
Note:		**Stock Item**		

PLASTIC SOCKET OUTLET CASE

SERIES
73

BOX SIZE
W x H x D 299 x 209 x 96 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
With kink-protector sleeve
and mounting rail
for 7 HP

ART.-NO. B 73.01

Plastic Socket Outlet Case Combinations

				
Fitted with				
CEE Sockets			1 x 5/16 A	2 x 5/16 A
SCHUKO Sockets	4	4	3	2
FI Switch (RCCB)	1 x 2/25/0.03 A	1 x 2/25/0.03 A	1 x 4/25/0.03 A	1 x 4/25/0.03 A
LS Switch/Fuse		2 x 16 A, 1-pole B	3 x 16 A, 1-pole B	1 x 16 A, 1-pole B
Supply Cable	2 m H07RN-F 3x2.5mm² with Solid Rubber SCHUKO Plug	2 m H07RN-F 3x2.5mm² with Solid Rubber SCHUKO Plug	2 m H07RN-F 5x2.5mm²with CEE Plug 5/16 A	2 m H07RN-F 5x2.5mm²with CEE Plug 5/16 A
Art.-No.	**Z 73.24**	**Z 73.25**	**Z 73.37**	**Z 73.12**
Note:		**Stock Item**	**Stock Item**	**Stock Item**

	
Fitted with	
CEE Sockets	2 x 5/32 A
SCHUKO Sockets	2
FI Switch (RCCB)	1 x 4/40/0.03 A
LS Switch/Fuse	2 x 16 A, 1-pole B
Supply Cable	2 m H07RN-F 5x4mm²with CEE Plug 5/32 A
Art.-No.	**Z 73.32**
Note:	

RUBBER MULTIPLE POWER STRIP

SERIES
48

HOUSING SIZE
W x H x D 115 x 430 x 70 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY

with window and mounting rail
for 4 HP
ART.-NO. B 48.01

Without window
ART.-NO. B 48.00

Rubber Multiple Power Strip Combinations

		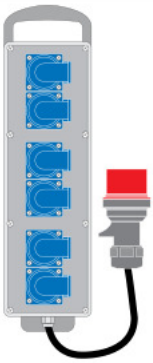	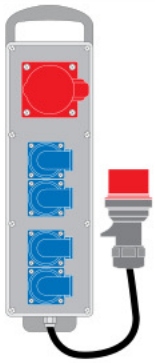
Fitted with			
CEE Sockets			1 x 5/16 A
SCHUKO Sockets	6	6	4
FI Switch (RCCB)			
LS Switch/Fuse			
Supply Cable	2 m H07RN-F 3x2.5mm²with Rubber SCHUKO Plug	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A
Art.-No.	**Z 48.10**	**Z 48.00**	**Z 48.20**
Note:	**Stock Item**		

		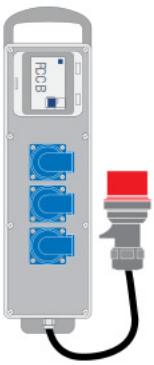	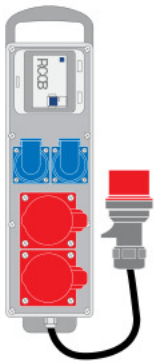
Fitted with			2 x 5/16 A
CEE Sockets	4	3	2
SCHUKO Sockets	1 x 2/25/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A
FI Switch (RCCB)			
LS Switch/Fuse	2 m H07RN-F 3x2.5mm²with Rubber SCHUKO Plug	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A
Supply Cable	**Z 48.30**	**Z 48.31**	**Z 48.11**
Art.-No.			
Note:			

RUBBER MULTIPLE POWER STRIP SAFETY PRCD-S

PRCD-S = Portable Residual Current Device – Switched PE

THE SAFETY POWER STRIP DETECTS FAULTS ON THE SUPPLY SIDE:

- L or N conductor interrupted / not connected
- L and PE conductors switched
- PE conductor interrupted / not connected
- PE conductor interrupted during operation
- PE conductor carries dangerous voltage
- Undervoltage

BGI 608

COMPULSORY FOR ALL MINOR CONSTRUCTION SITES! (GERMAN CONSTRUCTION INDUSTRY ASSOCIATION REGULATION BGI 608)

Rubber Power Strip Combinations (PRCD-S)

Basic Housing 48.00 · with window and mounting rail for 6 HP · Standard Combination Pre-wired ready to connect		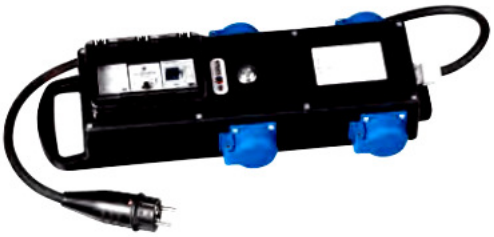
Fitted with		
SCHUKO Sockets	4	4
FI Switch (RCCB)	1 x 2/25/0.03 A	1 x 2/25/0.03 A
Ground Fault Protection with external voltage detection and undervoltage release	1 x 200cm	1 x 200cm
Supply Cable	2 m H07RN-F 3x2.5mm²with Rubber SCHUKO Plug	2 m H07RN-F 3x2.5mm²with Rubber SCHUKO Plug
Art.-No.	**B480119**	**B480123**
Note:	Sockets mounted on top	Sockets mounted on sides

RUBBER SOCKET OUTLET CASE

SERIES
58

BOX SIZE
W x H x D 292 x 359 x 112 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
With mounting rail for 13 HP

For CEE Feed Plug 5/16 A
ART.-NO. B 58.01

For CEE Feed Plug 5/32 A
ART.-NO. B 58.02

Rubber Socket Outlet Case Combinations

				
Fitted with				
CEE Sockets	2 x 5/16 A 1 x 3/16 A	1 x 5/16 A	1 x 5/32 A 1 x 5/16 A	1 x 5/32 A + 2 x 5/16 A 1 x 3/16 A
SCHUKO Sockets	5	6	6	5
FI Switch (RCCB)	1 x 4/25/0.03 A	1 x 4/25/0.03 A	1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	1 x 16 A, 3-pole C 3 x 16 A, 1-pole C	1 x 16 A, 3-pole C 3 x 16 A, 1-pole C	1 x 16 A, 3-pole C 6 x 16 A, 1-pole B	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 3 x 16 A, 1-pole C
Supply Cable	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A	2 m H07RN-F 5x6mm² with CEE Plug 5/32 A	2 m H07RN-F 5x6mm² with CEE Plug 5/32 A
Art.-No.	**Z 58.12**	**Z 58.16**	**Z 58.18**	**Z 58.17**
Note:		**Stock Item**	**Stock Item**	

				**Stand for Portable Socket Outlet Boxes Series 55 and 58**
Fitted with				
CEE Sockets	2 x 5/16 A	1 x 5/32 A 1 x 5/16 A	1 x 5/32 A 3 x 5/16 A	
SCHUKO Sockets	6	6	3	
FI Switch (RCCB)	1 x 4/25/0.03 A	1 x 4/40/0.03 A		
LS Switch/Fuse	1 x 16 A, 3-pole C 3 x 16 A, 1-pole B	1 x 16 A, 3-pole C 3 x 16 A, 1-pole B	3 x 16 A, 3-pole C 3 x 16 A, 1-pole B	
Supply Cable				
Power Supply	Appliance Plug 5/16 A	Appliance Plug 5/32 A	Appliance Plug 5/32 A	
Art.-No.	**Z 58.72**	**Z 58.48**	**Z 58.74**	**ZR50.00**
Note:				

RUBBER FREE-STANDING DISTRIBUTION UNITS

SERIES
68

HOUSING DIMENSIONS
W x H x D 300 x 306 x 240 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
with window and mounting rail for 9 HP

black	Black, without window
ART.-NO. B 68.01	**ART.-NO. B 68.00**
orange	orange
ART.-NO. B 68.11	**ART.-NO. B 68.10**

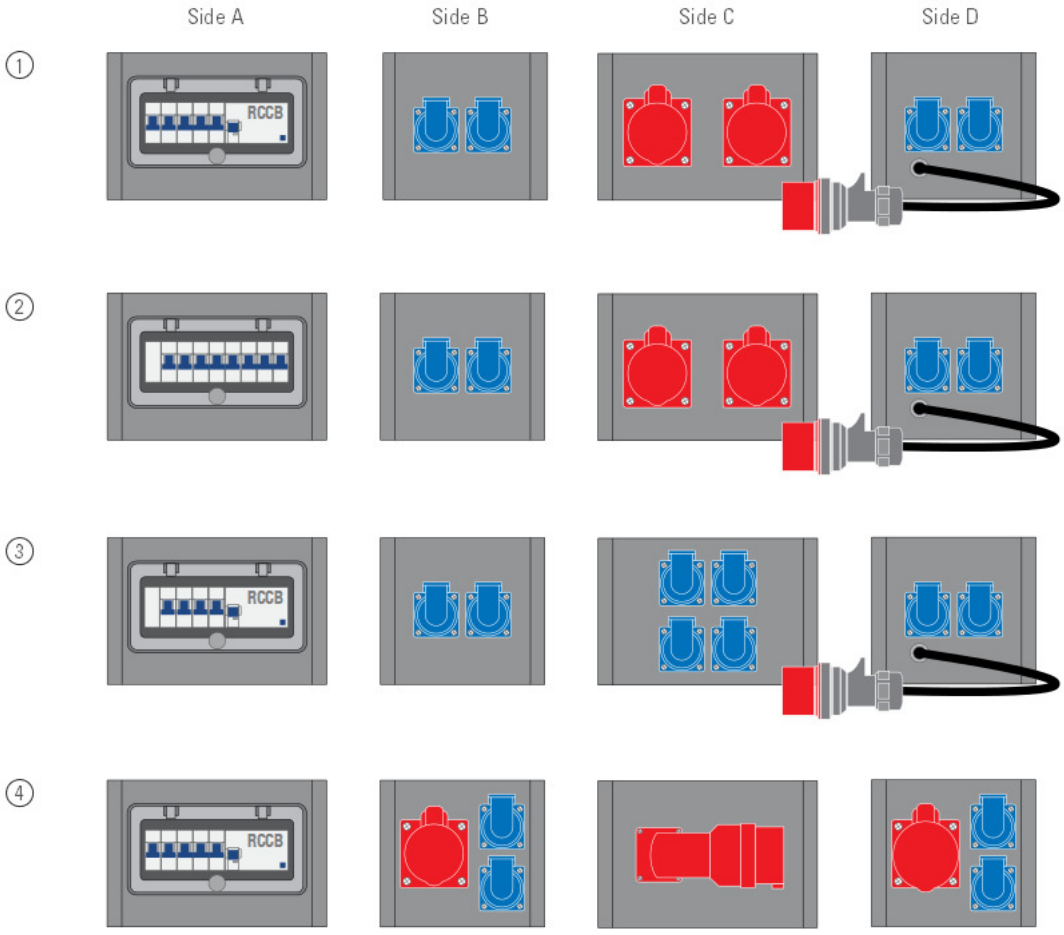

Rubber Free-standing Distribution Units Combinations

Fitted with	①	②	③	④
CEE Sockets	2 x 5/16 A	2 x 5/16 A		1 x 5/16 A + 1 x 5/32 A
SCHUKO Sockets	4	4	8	4
FI Switch (RCCB)	1 x 4/40/0.03 A		1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	2 x 16 A, 3-pole C 2 x 16 A, 1-pole B	4 x 16 A, 1-pole B	1 x 16 A, 3-pole C 2 x 16 A, 1-pole B
Supply Cable	2 m H07RN-F 5x2.5mm² with CEE Plug 5/16 A	2 m H07RN-F 5x6mm² with CEE Plug 5/32 A	2 m H07RN-F 5x6mm² with CEE Plug 5/32 A	
Power Supply				Appliance Plug 5/32 A
Art.-No. black	**Z 68.35**	**Z 68.16**	**Z 68.54**	**Z 68.42**
Art.-No. orange		**Z 68.06**		
Note:	**Stock Item**			**Stock Item**

RUBBER FREE-STANDING DISTRIBUTION UNITS

SERIES
68

HOUSING DIMENSIONS
BxHxT 300 x 456 x 240 mm

HOUSING ONLY
with two windows and
mounting rails for 2 x 9 HP

black
ART.-NO. B 68.02

orange
ART.-NO. B 68.12

SERIES
78

HOUSING DIMENSIONS
WxHxD 370 x 331 x 370 mm

HOUSING ONLY
without window

black
ART.-NR. B 78.00

orange
ART.-NR. B 78.10

HOUSING DIMENSIONS
BxHxT 370 x 486 x 370 mm

HOUSING ONLY
with 2 windows and mounting
rails for 2 x 12 HP

black
ART.-NO. B 78.02

orange
ART.-NO. B 78.12

RUBBER FREE-STANDING DISTRIBUTION UNITS

SERIES
78

HOUSING DIMENSIONS
W x H x D 370 x 331 x 370 mm
(without additions)

Fitted with the standard combination or a configuration tailored to your specific requirements

HOUSING ONLY
with window and mounting rail for 12 HP

black
ART.-NO. B 78.01

orange
ART.-NO. B 78.11

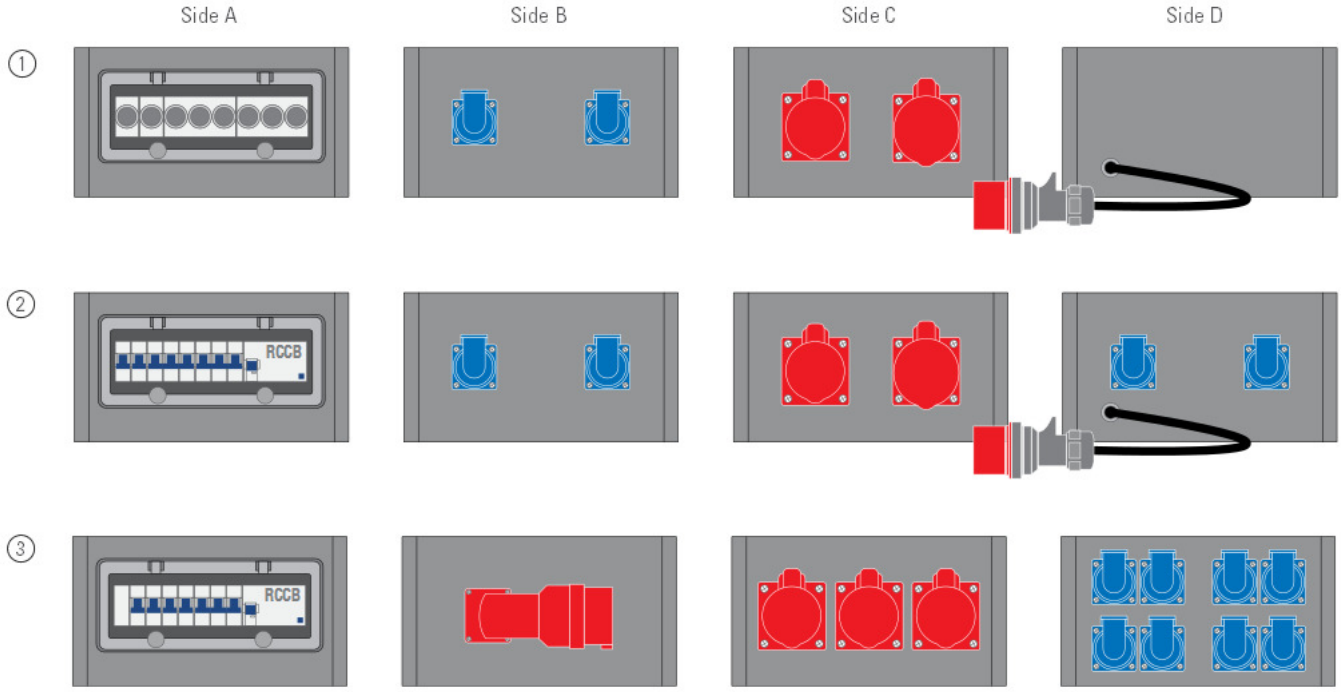

Rubber Free-standing Distribution Units Combinations

Fitted with	①	②	③
CEE Sockets	1 x 5/16 A + 1 x 5/32 A	1 x 5/16 A + 1 x 5/32 A	2 x 5/16 A + 1 x 5/32 A
SCHUKO Sockets	2	4	8
FI Switch (RCCB)		1 x 4/40/0.03 A	1 x 4/40/0.03 A
LS Switch/Fuse	Neozed Fuse Sockets 1 x 63 A, 3-pole 1 x 16 A, 3-pole 2 x 16 A, 1-pole	1 x 32 A, 3-pole C 1 x 16 A, 3-pole C 2 x 16 A, 1-pole B	1 x 16 A, 3-pole C 4 x 16 A, 1-pole B
Supply Cable	2 m H07RN-F 5 x 6 mm² with CEE Plug 5/32 A	2 m H07RN-F 5 x 6 mm² with CEE Plug 5/32 A	
Power Supply			Appliance Plug 5/32 A
Art.-No. black	**Z 78.08**	**Z 78.16**	**Z 78.46**
Art.-No. orange		**Z 78.06**	